



City of Richmond

Report to Committee

To: Public Works and Transportation Committee

Date: December 6, 2016

From: John Irving, P.Eng. MPA
Director, Engineering

File: 10-6060-01/2016-Vol
01

Re: Dike Master Plan - Phase 2

Staff Recommendation

That the public and key external stakeholders be consulted to provide feedback on the medium and long term dike improvements required for part of Richmond's West Dike (between Williams Road and Terra Nova Rural Park) and part of the North Dike (between Terra Nova Rural Park to No. 6 Road) as identified in the staff report titled "Dike Master Plan – Phase 2" from the Director of Engineering, dated December 6, 2016.

John Irving, P.Eng. MPA
Director, Engineering
(604-276-4140)

Att. 1

REPORT CONCURRENCE		
ROUTED TO:	CONCURRENCE	CONCURRENCE OF GENERAL MANAGER
Parks Services	<input checked="" type="checkbox"/>	
Roads & Construction	<input checked="" type="checkbox"/>	
Real Estate Services	<input checked="" type="checkbox"/>	
Sewer & Drainage	<input checked="" type="checkbox"/>	
Development Applications	<input checked="" type="checkbox"/>	
Policy Planning	<input checked="" type="checkbox"/>	
Transportation	<input checked="" type="checkbox"/>	
REVIEWED BY STAFF REPORT / AGENDA REVIEW SUBCOMMITTEE	INITIALS: 	APPROVED BY CAO

Staff Report

Origin

The 2008 – 2031 Richmond Flood Protection Strategy identified the need to “Prepare and implement a comprehensive dike improvement program.” On February 11, 2014, Council approved \$200,000 from the 2014 Capital Budget to prepare Phase 2 of a Dike Master Plan.

By the year 2100, climate change scientists estimate that sea level will rise approximately 1.0 meter, combined with 0.2 meters of subsidence that is expected in that same time period. Richmond will be required to raise dikes to accommodate these changes.

Richmond lies in the Fraser River delta, and is surrounded by the Fraser River estuary. The estuary provides critical habitat for many species of fish and wildlife, and important ecosystem services such as erosion control, shoreline stabilization and storm surge protection.

This report supports Council’s 2014-2018 Term Goal #6 Quality Infrastructure Networks:

6.1. Safe and sustainable infrastructure.

The purpose of this staff report is to present the medium and long term dike improvements along part of the West Dike and part of the North Dike (Phase 2 Study Area) that will be required to address climate change induced sea level rise. The West Dike spans between Williams Road and Terra Nova Rural Park. The North Dike section of the study area spans between Terra Nova Rural Park and No. 6 Road. Staff request Council’s endorsement to consult public and key external stakeholders on the long term dike improvements in the Phase 2 Study Area.

Analysis

The City of Richmond is approximately 1.0 meter above mean sea level and protected by 49 kilometers of dike. Climate change scientists estimate that sea level will rise approximately 1.0 meter by the year 2100, combined with 0.2 meter of subsidence that is expected in that same time period. Guided by the 2008 – 2031 Richmond Flood Protection Strategy, the City continues to adapt its flood protection system to protect against climate change induced sea level rise primarily through raising dike crest elevations. The City’s target dike elevation for 2100 is 4.7 m geodetic with the ability to expand it to 5.5 m geodetic. Dike improvements are ongoing through the Capital Program and the strategy forecasts that implementation completion will be required within the next 25 to 50 years to stay ahead of rising sea levels (current climate change science predicts sea level rise will be approximately 0.2 m by 2050). Implementation may include intermediate dike improvements where they make sense and would extend the timing for achieving 4.7 m geodetic dike heights for those reaches. Ultimately, the timing of implementation completion will be influenced by evolving climate change science and observed sea level rise. Staff will update Council on significant updates for sea level rise predictions and any impact they have on the Dike Master Plan implementation as they occur.

The Dike Master Plan is intended to be a comprehensive guide to upgrade the City's dikes to:

- Protect Richmond from both ocean storm surges and Fraser River freshet events;
- Adapt to sea level rise;
- Be seismically resilient;
- Integrate the Ecological Network Management Strategy principles and goals;
- Follow the five strategic directions of the City's 2009 Waterfront Strategy; and
- Prioritize dike improvement phasing to efficiently use resources.


Phase 1 of the Dike Master Plan, adopted by Council on April 22, 2013, focussed on Steveston and a portion of the West Dike south of Williams Road.

Phase 2 of the Dike Master Plan focusses on the north portion of Richmond's West Dike between Williams Road and Terra Nova Rural Park and part of Richmond's North Dike between Terra Nova Rural Park and No. 6 Road (Phase 2 Study Area), as shown in Figure 1.

The City engaged Parsons as the lead consultant to complete Phase 2 of the Dike Master Plan (see Attachment 1). The Phase 2 Study Area dike improvements required to address climate change induced sea level rise, as outlined in the Parsons report, are summarized in this report.


The City is committed to avoid, mitigate or compensate for environmental impacts on all capital projects. In general, the dike in the Phase 2 Study Area cannot be raised without environmental impacts and mitigation or compensation will be pursued in alignment with the City's ecological policies and strategies.

Figure 1: Phase 2 Study Area

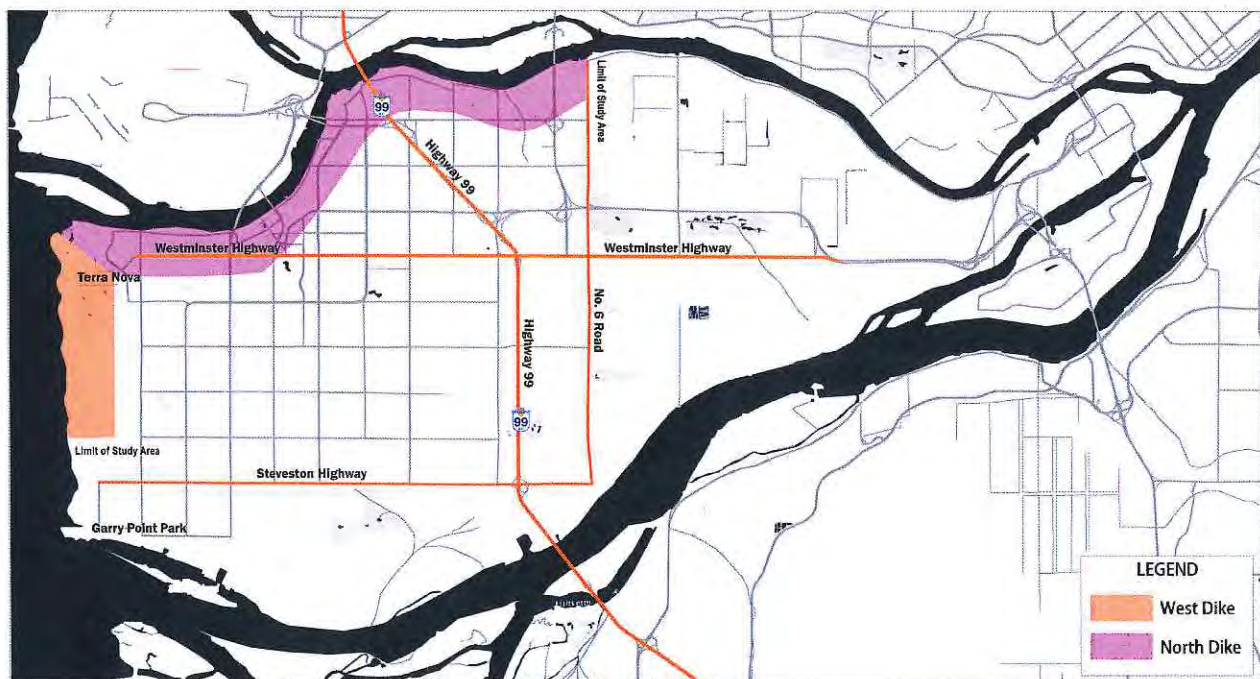

The Phase 2 Study Area is separated into thirteen design areas based on the planning boundaries established in the Official Community Plan (OCP). The thirteen design areas are shown in Figure 2.

Figure 2: Phase 2 Design Areas and OCP Boundaries

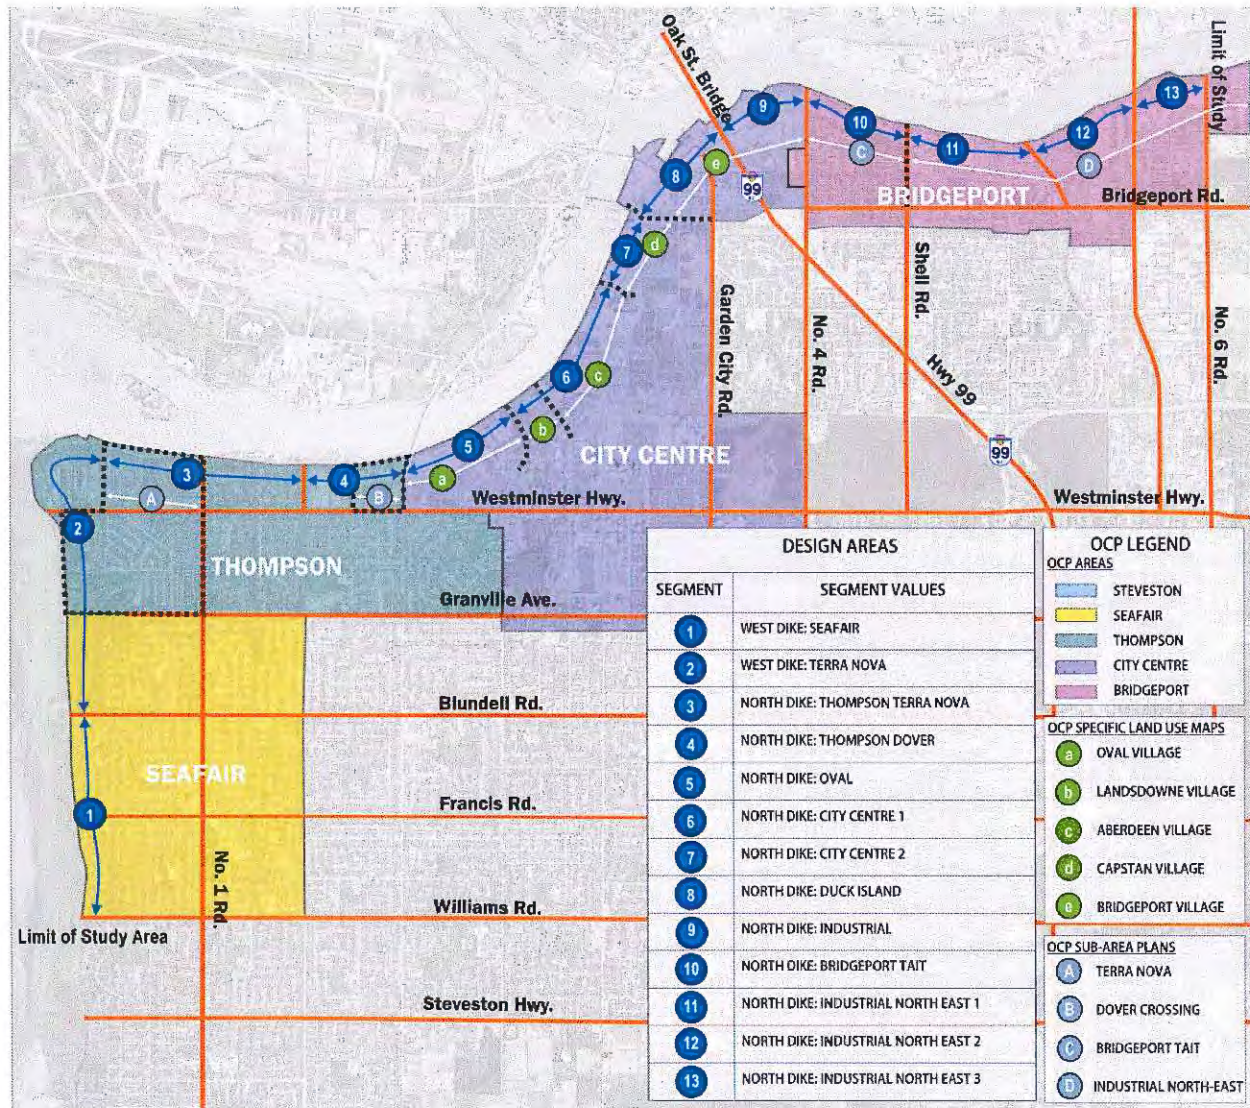

West Dike (Williams Road to Terra Nova Rural Park)

The Phase 2 Study Area includes part of the West Dike between Williams Road and Terra Nova Rural Park. Constraints, opportunities and recommendations for the Phase 2 Study Area of the West Dike separated by design area are summarized in Table 1.

Tables 1 and 2 identify environmental information pertinent to this area. FREMP refers to data from the Fraser River Estuary Management Program that identifies habitat productivity mapping. Though FREMP is no longer in place, this data continues to be pertinent to dike master plans. RMA refers to Riparian Management Areas which are City designated riparian habitats with associated 5 or 15 metres setbacks in response to the provincial Riparian Areas Regulation. In addition, the Fraser River shoreline within the LIDMP area is a City designated Environmental Sensitive Area with an associated development permit and applies to the entire study area.

The trigger for implementation of the long term dike improvement recommendation between Williams Road and Terra Nova Rural Park is sea level rise as has been projected by various expert panels through the year 2100.

Table 1: Summary of constraints/opportunities/recommendations for part of the West Dike

Design Area	FREMP Data			RMA		Constraints	Opportunities	Long Term Dike Improvement Recommendation
	Red Coded	Yellow Coded	Green Coded	Presence	Absence			
1) Seafair 2) Terra Nova	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<ul style="list-style-type: none"> Infilling of drainage ditches impacts potential storage in the City's local drainage network 	<ul style="list-style-type: none"> Barrier islands may be considered to reduce wave run-up, mitigating the need for future dike crest increases 	<ul style="list-style-type: none"> Raise dike on existing alignment Further study required to determine the ecological and technical advantages/disadvantages of land side and water side expansion

North Dike (Terra Nova to No. 6 Road)

The Phase 2 Study Area includes part of the North Dike between Terra Nova Rural Park and No. 6 Road. Constraints, opportunities and recommendations for the Phase 2 Study Area of the North Dike separated by design area are summarized in Table 2.

The triggers for implementation of the long term dike improvement recommendation between Terra Nova Rural Park and No. 6 Road are sea level rise, development, redevelopment and River Road reconstruction.

Table 2: Summary of constraints/opportunities/recommendations for part of the North Dike

Design Area	FREMP Data			RMA		Constraints	Opportunities	Long Term Dike Improvement Recommendation
	Red Coded	Yellow Coded	Green Coded	Presence	Absence			
3) Thompson Terra Nova	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<ul style="list-style-type: none"> Residential driveway access and drainage along River Road may be complicated by raising the dike 	<ul style="list-style-type: none"> No easements or land acquisitions required for dike raising 	<ul style="list-style-type: none"> Raise the dike on existing alignment with land side expansion Plan for the long-term raising of River Road
4) Thompson Dover	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		<ul style="list-style-type: none"> River Road may be raised in a single event as driveway access to multi-family complexes can be maintained in this area 	<ul style="list-style-type: none"> Raise the dike on existing alignment with land side expansion Plan to raise River Road
5) Oval	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>		<ul style="list-style-type: none"> Future dike raising can take place on the existing dike alignment and integrate into adjacent landscaping 	<ul style="list-style-type: none"> Existing dike has been raised
6) City Centre 1	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<ul style="list-style-type: none"> Mature trees near land side toe of existing dike 	<ul style="list-style-type: none"> This section of River Road will ultimately be realigned to the former rail corridor 	<ul style="list-style-type: none"> Raise the dike on existing alignment with land side expansion
7) City Centre 2	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<ul style="list-style-type: none"> Access to existing marinas may be complicated by raising the dike 	<ul style="list-style-type: none"> This section of River Road will ultimately be realigned to the former rail corridor Redevelopment is occurring in this area 	<ul style="list-style-type: none"> Raise the dike on existing alignment with land side expansion in conjunction with redevelopment
8) Duck Island	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		<ul style="list-style-type: none"> Redevelopment is occurring in this area 	<ul style="list-style-type: none"> Dike improvements will be a part of the Duck Island development plan.
9) Industrial	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<ul style="list-style-type: none"> Easements will be required Waterfront lands constrained by private industrial uses 		<ul style="list-style-type: none"> Raise the dike on existing alignment with land side expansion Site specific solution may be required to accommodate waterfront lands constrained by private industrial uses
10) Bridgeport Tait	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>		<ul style="list-style-type: none"> Future dike raising can take place on the existing dike alignment and integrate into adjacent landscaping 	<ul style="list-style-type: none"> Existing dike has been raised
11) Industrial North East 1	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<ul style="list-style-type: none"> Driveway access along River Road may be complicated by raising the dike Property will need to be acquired to complete dike raising 	<ul style="list-style-type: none"> Waterfront trail can be constructed over the dike when property is acquired 	<ul style="list-style-type: none"> Raise the dike on existing alignment with land side expansion
12) Industrial North East 2	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<ul style="list-style-type: none"> Mature trees near water side toe of existing dike Street parking will be impacted Driveway access along River Road may be complicated by raising the dike Property may need to be acquired to complete dike raising Infilling of drainage ditches impacts potential storage in the City's local drainage network 	<ul style="list-style-type: none"> Waterfront trail can be constructed over the dike 	<ul style="list-style-type: none"> Raise the dike on existing alignment Further study required to determine the ecological and technical advantages/ disadvantages of land side and water side expansion
13) Industrial North East 3	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<ul style="list-style-type: none"> Mature trees near water side toe of existing dike Street parking will be impacted Driveway access along River Road may be complicated by raising the dike Infilling of drainage ditches impacts potential storage in the City's local drainage network 	<ul style="list-style-type: none"> Waterfront trail can be constructed over the dike No easements or land acquisitions required for dike raising 	<ul style="list-style-type: none"> Raise the dike on existing alignment Further study required to determine the ecological and technical advantages/ disadvantages of land side and water side expansion Site specific solution may be required to accommodate waterfront lands constrained by private industrial uses

Land Acquisition

Some dike reaches are constrained by land ownership and will likely require land acquisition to facilitate dike raising. Land acquisition will primarily be achieved through redevelopment, however, where redevelopment does not occur; the City may consider opportunistic land purchase over the next 25 to 50 years. The Dike Maintenance Act allows the City through the Provincial Inspector of Dikes to access the entire dike protecting Lulu Island for the purpose of dike maintenance or improvement regardless of land ownership. However, long term strategic acquisition of land and cooperative work with the development community will reduce the impact of dike improvements on the community as compared to reliance on the Dike Maintenance Act.

Next Steps

Staff will consult with key external stakeholders and the public on the long term dike improvements in the Phase 2 Study Area. Key stakeholders include:

- Adjacent residences and the general public
- Port of Vancouver
- Department of Fisheries and Oceans
- BC Inspector of Dikes
- Advisory Committee on the Environment
- Urban Development Institute


The key external stakeholder group will be engaged through ongoing meetings and communications. Public consultation will include two public open houses.

Financial Impact

Capital projects will be brought forward for Council's consideration.

Conclusion

Consistent with the City's 2008 – 2031 Richmond Flood Protection Strategy, Phase 2 of a Dike Master Plan has been drafted. Dike Master Plan Phase II presents the medium and long term dike improvements along part of the West Dike (Williams Road to Terra Nova Rural Park) and part of the North Dike (Terra Nova Rural Park to No. 6 Road) that will be required to address climate change induced sea level rise. Staff request Council's endorsement to consult public and key external stakeholders in order to obtain feedback on the long term dike improvement recommendations within the Phase 2 Study Area.

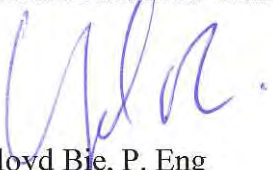

Lloyd Bie, P. Eng
Manager, Engineering Planning
(604-276-4075)





Corrine Haer, EIT
Project Engineer
(604-276-4026)

Att. 1: Dike Master Plan -- Phase 2



**LULU ISLAND DIKE MASTER PLAN
PHASE 2
DRAFT REPORT**

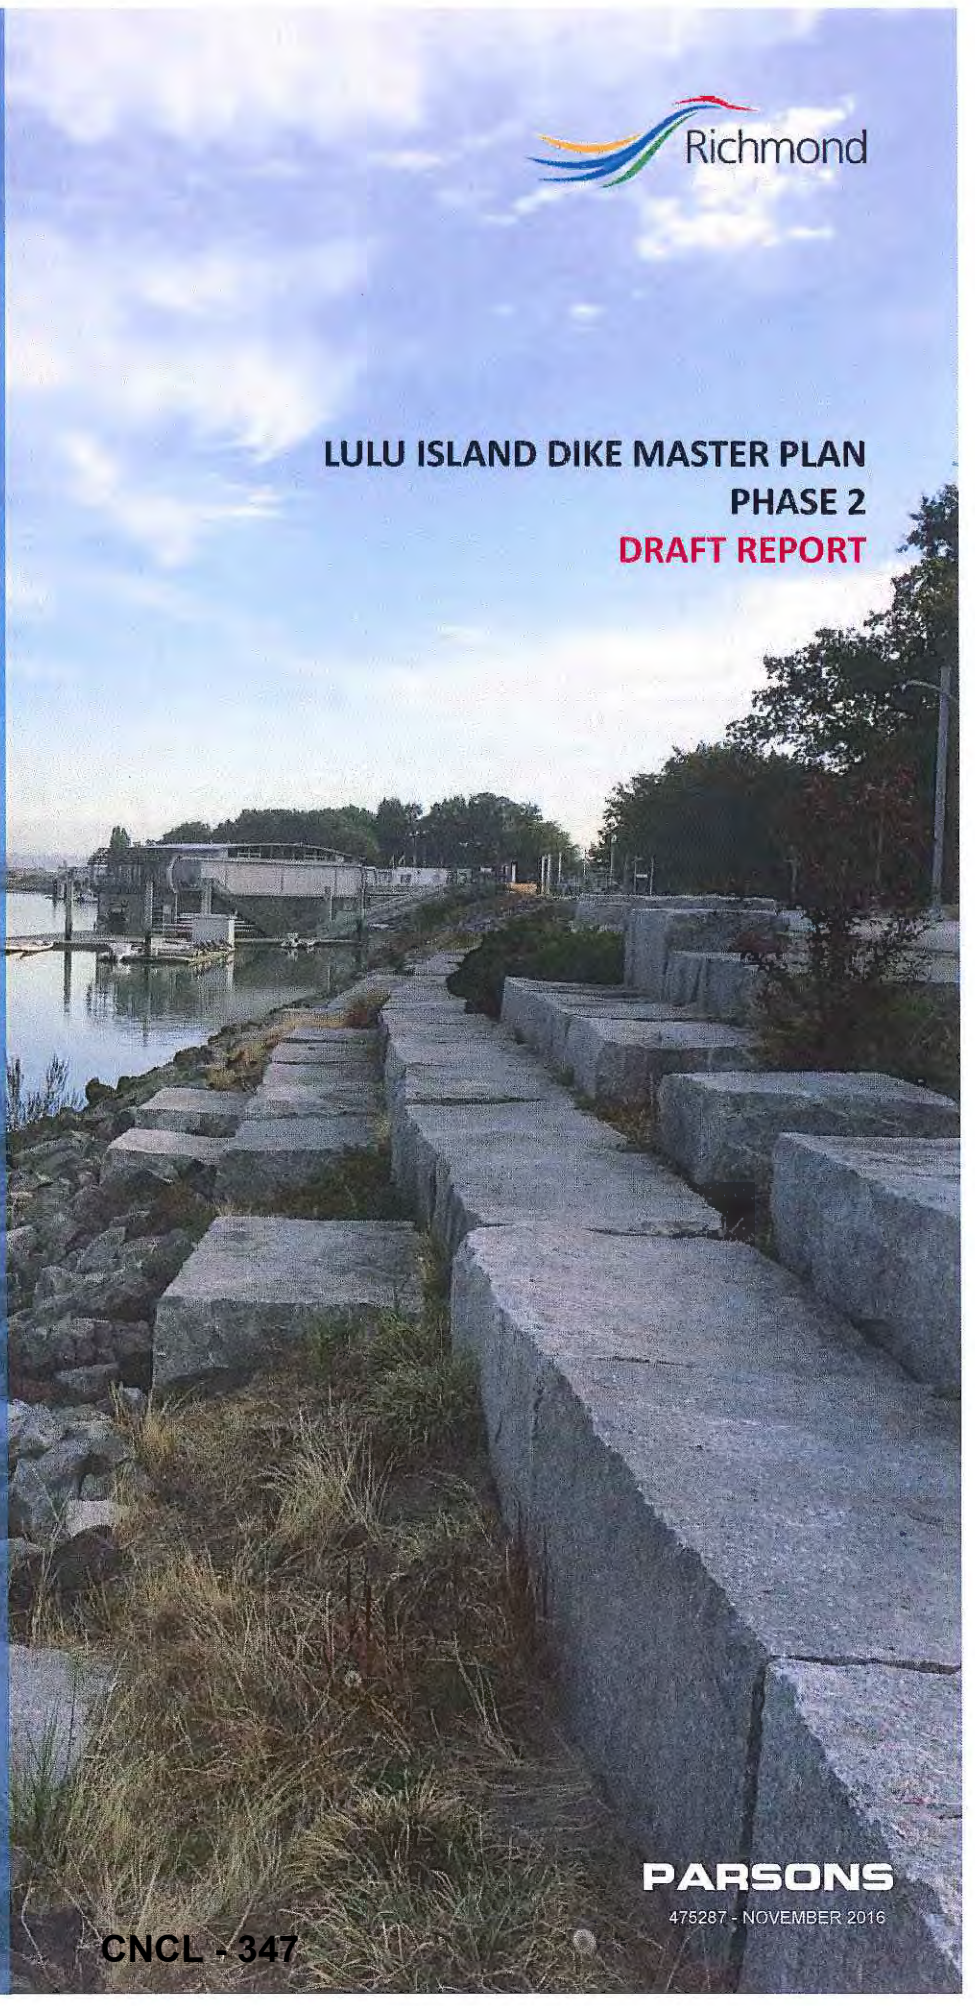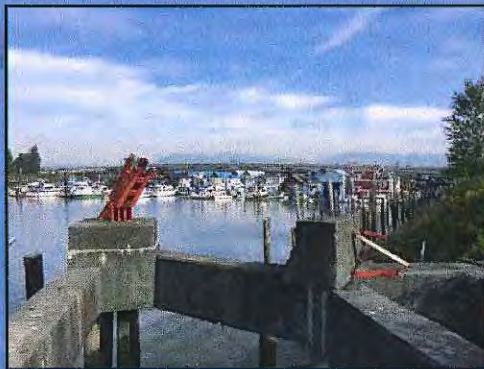


PARSONS

475287 - NOVEMBER 2016

CNCL - 347

Executive Summary

The purpose of the Lulu Island Dike Master Plan (LIDMP) is to identify preferred methods for implementing the objectives of the City of Richmond's 2008 – 2031 Flood Protection Strategy. The Lulu Island Dike Master Plan is being prepared in phases. Parsons (as Delcan) prepared Phase 1 of the plan for the Steveston and southern West Dike areas¹ (Phase 1 LIDMP). The Study Area for Phase 2 has been defined from Williams Road on the West Dike to No. 6 Road on the North Dike. The Study Area is highlighted orange within Lulu Island in the figure below. Lulu Island lies in the Fraser River Delta, and is surrounded by the Fraser River Estuary. The estuary provides critical habitat for many species of fish and wildlife, and important ecosystems services such as erosion control, shoreline stabilization and storm surge protection.

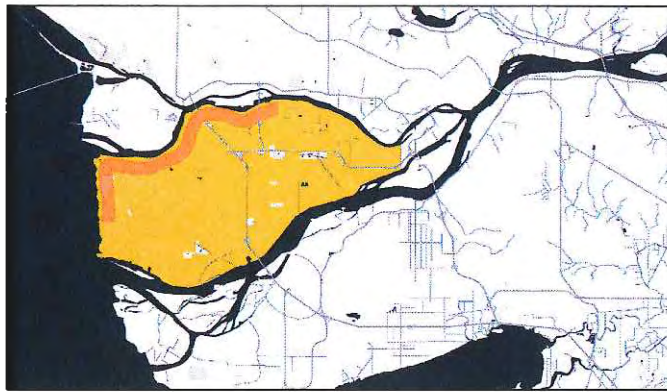

Phase 2 LIDMP Study Area on the West Dike and North Dike within Lulu Island

The Phase 1 LIDMP focused largely on technical issues of assessing significant changes in dike alignment. Instead of adapting upgrades to the existing shoreline alignment which may have impacted heritage structures in Steveston, the engineering feasibility of a future dike and flood-gate along Steveston Island was presented.

In the Phase 2 Study Area, the existing dike alignment along the waterfront is established and well defined. There is limited basis to support any major changes to the alignment of the existing dike, thus the recommendations are generally in keeping with traditional dike crest increases, with consideration for localized constraints and opportunities. The Study Area

has been segmented into thirteen design areas to make these recommendations on an area specific basis. There are also opportunities to consider flood protection strategies that are applicable throughout the entire Study Area. These area wide strategies may be implemented to fortify the area specific adaptations.

The City has identified a target dike crest elevation of 4.7 m, with consideration for raising the dike to 5.5 m in the long term future. Dike adaptations that achieve the target crest elevation are considered by area, forming the area specific adaptations. These include dikes and floodwalls in any conformation. Area wide adaptations are those which may not achieve the target dike crest elevation on their own, but contribute to overall flood protection. For example, barrier islands that reduce wave run-up to eliminate the need for additional target crest increases, or policy changes that facilitate the implementation of dike adaptations are both categorized as area wide adaptations. Both area wide and area specific strategies will be presented in the LIDMP, forming a comprehensive plan to achieve the objectives of the Flood Protection Strategy. Area wide and area specific strategies will be considered within the context of the City's Ecological Network Management Strategy (ENMS) such that the recommendations presented in the LIDMP are consistent with strengthening the City's green infrastructure, while managing and enhancing ecological assets.

Area Wide Protection Strategies

A number of area wide approaches can be considered to enhance long term flood protection in the City and create resiliency in addressing climate change and sea level rise. Preferred strategies are summarized below.

Plan for the long-term raising of lands adjacent to and inland of the existing dikes: Long term raising of land levels has previously been recommended (2008-2031 Flood Protection Strategy). Maximizing the width of raised land adjacent to the river decreases flood and seismic risks by increasing the integrity of the dike. Plan to raise the ground elevation of waterfront development sites to the prescribed dike crest elevation.

¹ Lulu Island Dike Master Plan Phase 1, Delcan, March 2013

Enhance floodproofing through amendments to the FCL By-law: The City's Flood Construction Level (FCL) Bylaw establishes minimum levels to which land needs to be raised. Amending the FCL bylaw is the recommended area wide strategy to regulate raising ground elevations with redevelopment to improve flood protection throughout the Study Area.

Support site assemblies along the waterfront that promote cohesive adaptations for flood protection: Large developments along the waterfront allow for major improvements to flood protection infrastructure and often result in robust superdike conditions.

Plan for implementation of offshore protection on Sturgeon Banks: If climate change and sea level rise predictions materialize, increased depths offshore could simultaneously increase wave heights, particularly in the Georgia Strait. Upland limitations to natural accretion within the Sturgeon Bank Wildlife Management Area may also contribute to increased offshore depths beyond the West Dike. Offshore barrier islands are one option to consider to dissipate wave energy prior to waves reaching the West Dike and stabilize shorelines, thereby minimizing future dike crest increases. Enhancement of intertidal habitat alongside the creation of offshore barrier islands may provide natural ecosystem mechanisms to further dissipate wave energy. The City may consider offshore protection in its long-term plans for flood protection along the West Dike.

Area Specific Flood Protection Strategies

In practice, when dike upgrades have been made, they have been made along the existing alignment. Apart from select site specific constraints and opportunities, the recommended future dike alignment for the Phase 2 Study Area matches the existing dike alignment. Area specific strategies were selected with consideration for: flood protection, environmental, geotechnical, infrastructure, site-specific constraints, social, property, economic, operational and cost considerations. The City is committed to avoid, mitigate or compensate for any environmental impacts that may result from dike adaptation projects. Completely avoiding any impact on an environmental area may not be feasible in some cases, for example where dikes are highly constrained. In these instances, mitigation or compensation that follows a net gain approach may be pursued.

Area specific strategies for the Phase 2 study are summarized below:

West Dike: Raise the dike on the existing alignment. Additional studies required to quantify drainage impacts of land side expansion, habitat impacts and costs associated with water side or land side expansion, and long term resiliency of a constrained dike solution. Consider routing the dike inland through Terra Nova Rural Park.

North Dike: Terra Nova to No. 2 Road Bridge: Raise the dike on the existing alignment with land side expansion. Plan for the raising of River Road.

North Dike: No. 2 Road Bridge to Dinsmore Bridge: Existing and proposed developments are raising elevations to 4.0 m to 4.7 m. Future raisings to 5.5 m can take place on the existing alignments and integrate into the adjacent landscaping.

North Dike: Dinsmore Bridge to Moray Bridge: Raise the dike with land side expansion. Consider creation of a set-back dike and inland raising (superdike) in conjunction with the future Middle Arm Waterfront Park construction. Ensure any interim dike upgrades are compatible with the long term strategy of constructing superdikes.

North Dike: Moray Bridge to Oak Street Bridge: Implement flood protection with approved development plans for Duck Island and the River Rock Casino when available. If required to address sea level rise and climate change prior to implementation of the approved strategy at the Duck Island or River Rock Casino sites, plan for a temporary adaptation, such as a demountable floodwall, to protect City assets

North Dike: Oak Street Bridge to No. 4 Road: Raise the dike on the existing alignment. Site specific solutions may be required at the Fraser River Terminal site. Plan for temporary dike along the alternate alignment if required to address sea level rise and climate change prior to implementation of a strategy at the Fraser River Terminal site.

North Dike: No. 4 Road to Shell Road: Existing and proposed developments will raise the area generally to an elevation of 4.7 m. Future raisings to 5.5 m can take place on the existing alignments and integrate into the adjacent landscaping.

North Dike: Shell Road to No. 6 Road: Raise the dike on the existing alignment. Land acquisition may be required to facilitate construction of a trapezoidal dike (through redevelopment or otherwise). Implementation of a temporary floodwall

adjacent to the waterfront lots may be required in advance of a permanent adaptation to address sea level rise and climate change. Consider Bath Slough Revitalization Initiative for future designs. Additional studies are required to quantify drainage, habitat impacts, and costs associated with land side expansion of a trapezoidal dike. A constrained land side slope may be required to integrate with the existing drainage infrastructure.

Next Steps

Parsons has characterized the existing conditions and constraints of the Study Area, and has established and recommended preferred area wide and area specific adaptation strategies for the City's consideration.

The recommended next steps to finalize the Phase 2 LIDMP are:

- 1) Council Review;
- 2) Key External Stakeholder Review;
- 3) Public Information Session and Consultation;
- 4) Revise the Draft Final Master Plan Report per consultation if required; and
- 5) Council adoption of the Final Dike Master Plan Phase 2 Report.

Table of Contents

EXECUTIVE SUMMARY.....	I
1 INTRODUCTION.....	1
1.1 SCOPE.....	2
1.2 APPROACH.....	2
1.3 ADDITIONAL GUIDANCE DOCUMENTS.....	2
2 STUDY AREA.....	3
2.1 PRESENT AND FUTURE LAND USE.....	5
2.2 GEOTECHNICAL CONDITIONS.....	6
2.3 ENVIRONMENTAL CONDITIONS.....	7
2.4 EXISTING FLOOD PROTECTION INFRASTRUCTURE.....	10
2.5 EXISTING FLOOD PROTECTION POLICY.....	11
3 CONSIDERATIONS.....	11
3.1 FLOOD PROTECTION CONSIDERATIONS.....	11
3.2 ENVIRONMENTAL CONSIDERATIONS.....	12
3.3 GEOTECHNICAL CONSIDERATIONS.....	12
3.4 INFRASTRUCTURE CONSIDERATIONS.....	14
3.5 SITES WITH UNIQUE CONSTRAINTS.....	15
3.6 SOCIAL CONSIDERATIONS.....	15
3.7 PROPERTY CONSIDERATIONS.....	15
3.8 ECONOMIC CONSIDERATIONS.....	16
3.9 OPERATIONAL CONSIDERATIONS.....	16
3.10 COST CONSIDERATIONS.....	16
4 FLOOD RISK MANAGEMENT ADAPTATIONS.....	16
4.1 AREA WIDE ADAPTATIONS.....	18
4.1.1 Superdikes.....	18
4.1.2 Flood Proofing.....	19
4.1.3 Planning and Development Controls.....	21
4.1.4 Breakwaters and Barrier Islands.....	21
4.1.5 Secondary Dikes.....	23
4.2 AREA SPECIFIC ADAPTATIONS.....	24
4.2.1 Seafair.....	27

4.2.2	Terra Nova	28
4.2.3	Thompson Terra Nova.....	29
4.2.4	Thompson Dover	30
4.2.5	Oval	31
4.2.6	City Centre 1	32
4.2.7	City Centre 2	33
4.2.8	Duck Island.....	34
4.2.9	Industrial.....	35
4.2.10	Bridgeport Tait.....	36
4.2.11	Industrial North East 1.....	37
4.2.12	Industrial North East 2.....	38
4.2.13	Industrial North East 3.....	39
4.3	SITE SPECIFIC ADAPTATIONS	40
4.3.1	Bridges.....	40
4.3.2	Raise River Road	41
5	TIMING OF ADAPTATION PROJECTS.....	42
5.1	REDEVELOPMENT OF SMALL LOTS	43
5.2	LAND ACQUISITIONS & LEGAL ACCESS	43
5.3	RAISING THE TARGET DIKE CREST ELEVATION	43
5.4	INTERIM ADAPTATIONS	43
6	IMPLEMENTATION OPPORTUNITIES	44
6.1	WATERFRONT TRAIL SYSTEM	44
6.2	INTERTIDAL ZONES.....	45
6.3	HABITAT BANKING	45
7	RECOMMENDATIONS	45
8	CLOSURE & NEXT STEPS.....	47

List of Figures

Figure 1	Study Area
Figure 2	Design Areas and OCP Boundaries
Figure 3	Riparian Management Areas (RMA's)
Figure 4	Foreshore Habitat Coding in the Study Area
Figure 5	Superdikes in the Study Area
Figure 6	Flood Construction Levels (FCL's)
Figure 7	Artistic Rendering of Barrier Island Concept for Sturgeon Bank
Figure 8	Secondary Dike Alignment through Terra Nova
Figure 9	Concept Plan for the Proposed Middle Arm Park
Figure 10	Bridges in the Study Area
Figure 11	Raising River Road in the Thompson Neighbourhood

List of Tables

Table 1	Existing and Future Conditions
Table 2	Recommended Flood Risk Management Strategies
Table 3	Recommended Area Specific Adaptations
Table 4	Bridge Constraints and Recommended Adaptations
Table 5	Triggers to Implementation of Adaptations

List of Appendices

Appendix A	Official Community Plan Maps
Appendix B	Riparian Management Areas
Appendix C	Environmentally Sensitive Areas
Appendix D	Ecological Network Strategy Areas
Appendix E	Habitat Coding Maps
Appendix F	Typical Dike Cross Sections

List of Attachments

Attachment 1	Technical Memo #1 - Parsons
Attachment 2	Technical Memo #2 - Parsons
Attachment 3	Geotechnical Input Memo - Thurber
Attachment 4	Environmental Technical Brief - Envirowest
Attachment 5	Seismic Deformation Analysis - Thurber


1 Introduction

Richmond is a city of over 200,000 people in 130 square kilometres with considerable assets to be protected from flood damage. The City has endeavoured to adapt its flood protection systems to changing flood risks, including anticipated increases to flood levels resulting from climate change and sea level rise. With the establishment of the 2008 – 2031 Flood Protection Strategy, the City committed to prepare and implement a perimeter dike improvement program. The purpose of the Lulu Island Dike Master Plan (LIDMP) is to identify preferred methods for implementing the objectives of the City of Richmond’s 2008 – 2031 Flood Protection Strategy.

With Richmond located at the mouth of the Fraser River, and the flood protection infrastructure interfacing with the high ecological value of the Fraser River Estuary, the LIDMP also works to integrate the objectives of key City documents such as the City’s Ecological Network Management Strategy (ENMS), and put forward recommendations that will strengthen the City’s green infrastructure network.

The LIDMP is being prepared in phases. Parsons (as Delcan) prepared Phase 1 of the LIDMP for the Steveston and southern West Dike areas² (Phase 1 LIDMP). The Study Area for the second phase of the LIDMP (Phase 2 LIDMP) includes the West Dike from Willams Road to Terra Nova Rural Park, and the North Dike from Terra Nova Rural Park to No. 6 Road as shown in *Figure 1*.

Figure 1: Study Area

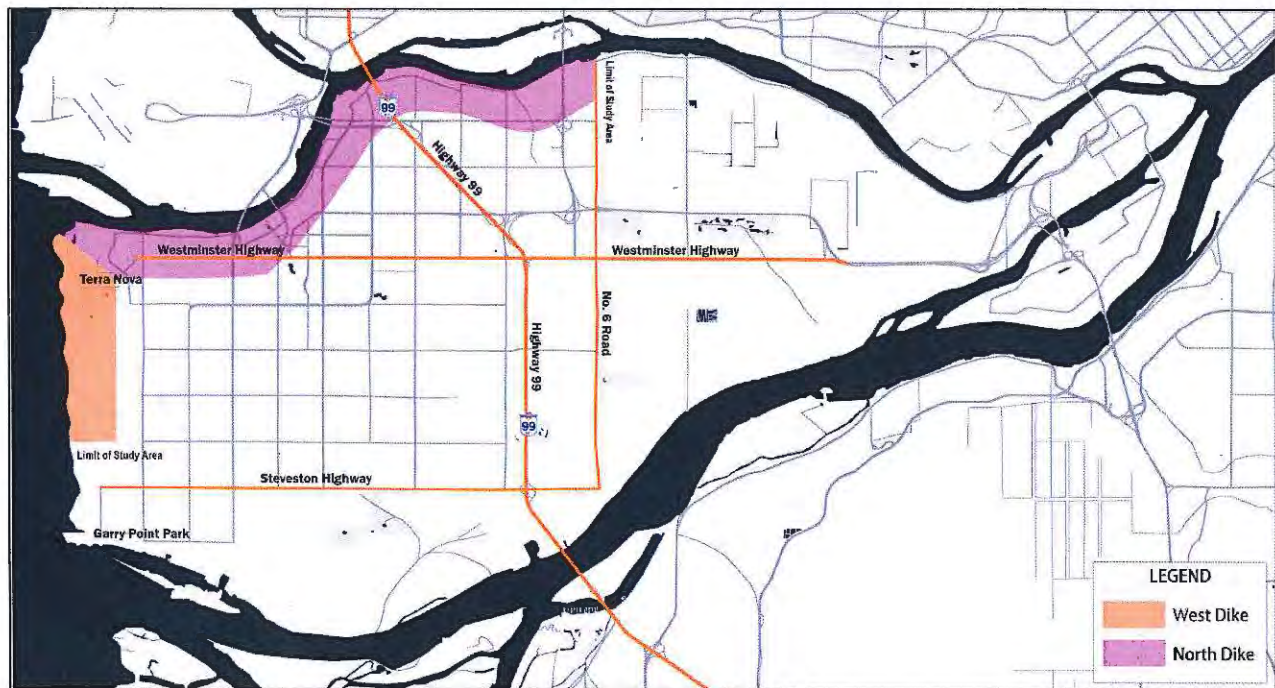

The Phase 2 LIDMP provides the framework to direct future dike improvement projects and ensure that diking requirements are considered as waterfront lands are redeveloped. It establishes a well-planned strategy to identify future flood protection infrastructure requirements along the waterfront. The Phase 2 LIDMP presents recommended adaptations for flood protection, including guidelines for incorporating flood protection into future waterfront developments. It also presents considerations for any dike adaptation project in the Study Area to minimize impacts and to integrate adaptations within the public and natural realms.

² Lulu Island Dike Master Plan Phase 1, Delcan, March 2013

1.1 SCOPE

The recommended flood protection adaptations forming the Phase 2 LIDMP are assessed for their ability to achieve a minimum crest elevation of 4.7 m, and accommodate a future increase to 5.5 m as prescribed by the City. No independent evaluation of these crest elevations has been conducted by Parsons. These target elevations have been accepted as the basis for the Phase 2 LIDMP.

Recommendations have been categorized as either area wide or area specific adaptations. Area wide strategies encompass adaptations that are applicable for the entire Study Area, or a substantial part of it. These include policy adaptations, as well as structural adaptations that would fortify the primary dike, but would not achieve the City’s target crest elevation on its own. The Phase 2 LIDMP recommends adaptations in both categories to produce a comprehensive strategy for improving flood protection in the Study Area.

Area specific strategies are structural adaptations that modify the existing dike or replace it to achieve the City’s target dike crest elevation of 4.7 m. The Study Area has been broken into thirteen design areas to recommend area specific adaptations. The design areas have been delineated according to the boundaries for planning areas in the City’s Official Community Plan (OCP). The design areas are described further in *Section 2* and *Section 4.2*.

The Phase 2 LIDMP is a guidance document for future dike adaptation design and construction projects. No detailed design, nor any construction will be undertaken as part of the Phase 2 LIDMP. Design and construction projects are beyond the scope of the current planning exercise. Proponents of diking design and construction projects will need to confirm their projects are in compliance with all regulatory requirements, in addition to adhering to the Master Plan, when projects move forward.

1.2 APPROACH

In preparation of the Phase 2 LIDMP, Parsons previously prepared and submitted two technical memos to the City. Technical Memo #1³ (TM #1) presented potential flood protection options that may be appropriate for implementation in the Study Area, based on a detailed review of current and future land uses, environmental and geotechnical conditions, and other City guidance documents. Technical Memo #2⁴ (TM #2) outlined the evaluation of potential flood protection adaptations within the Phase 2 Study Area, and presented the preliminary concept for the Phase 2 LIDMP. Both technical memos have been attached to the Phase 2 LIDMP as *Attachment 1* and *Attachment 2* for reference.

Both technical memos were circulated internally to relevant City departments for review. The feedback received from these stakeholders was integrated into the technical memos before each was finalized. The final Phase 2 LIDMP is derived from these previous studies and as such, City feedback has been incorporated into the Phase 2 LIDMP.

1.3 ADDITIONAL GUIDANCE DOCUMENTS

The recommendations in the Phase 2 LIDMP have been prepared in keeping with other City strategies and plans. Any proposed diking projects should be designed and constructed with consideration for the Phase 2 LIDMP, as well as any other City guidance documents in effect at the time an adaptation project proceeds to design and construction. Policy adaptations should also be implemented with consideration for compatibility with other City strategies and guidelines. City guidance documents considered in the development of the Phase 2 LIDMP included:

- 2009 Waterfront Strategy:** The five Strategic Directions of the 2009 Waterfront Strategy were considered in the development of the Phase 2 LIDMP. The Strategic Directions include: 1) Working Together; 2) Amenities and Legacy; 3) Thriving Ecosystems; 4) Economic Vitality; and 5) Responding to Climate Change and Natural Hazards.

³ Lulu Island Dike Master Plan Phase 2 – Technical Memo No. 1: Review of Existing Conditions, Parsons, Oct 5, 2016

⁴ Lulu Island Dike Master Plan Phase 2 – Technical Memo No. 2: Analysis of Flood Protection Alternatives, Parsons, Oct 5, 2016

Flood Plain Designation and Protection By-Law 8204:

The Phase 2 LIDMP considers the existing Flood Plain Designation and Protection By-Law, and will consider outlines potential options to amend or accelerate increasing flood construction levels adjacent to the foreshore.

2008 – 2031 Richmond Flood Protection Strategy:

The Phase 2 LIDMP has been developed to address the goals of the Flood Protection Strategy.

2015 Ecological Network Management Strategy:

The Phase 2 LIDMP is informed by the strategic goals outlined in the 2015 Ecological Network Management Strategy (ENMS) to promote the Ecological Network. The City's ENMS is an ecological blueprint for the preservation of natural land City-wide. Through the ENMS the City will protect, restore and connect natural lands to avoid habitat fragmentation. The strategic goals outlined in the ENMS are: 1) Manage and Enhance Ecological Assets; 2) Strengthen City Green Infrastructure; 3) Create, Connect, and Protect Diverse and Healthy Spaces; 4) Engage through Stewardship and Collaboration. The objective of developing an Ecological Network was initially outlined in the OCP under Chapter 9: Island Natural Environment (and Ecological Network Approach).

2006 Riparian Response Strategy:

The Phase 2 LIDMP is consistent with the Riparian Response Strategy (RRS), which protects Riparian Management Areas that form part of the City's Ecological Network. The RRS identifies 5 m and 15 m Riparian Management Area (RMA) setbacks on minor and major watercourses that flow into and support fish life in the Fraser River, and are to remain free from development in accordance with requirements under the provincial Riparian Area Regulation. The RRS applies to riparian habitat on the City's inland watercourses but does not apply to the Fraser River, which is protected through designation as Environmentally Sensitive Area (ESA) in the OCP.

2008 Climate Change Response Agenda:

The recommendations from the Phase 2 LIDMP are made with consideration of the 3rd pillar of the City's Climate Change Response Agenda – implement strategies for adapting to unavoidable changes. Strategies have been considered that can meet the short and long term goals with respect to crest elevations; however, they must also be adaptable to change.

2010 Richmond Trail Strategy:

The Phase 2 LIDMP is developed with regard for the goal of maximizing access to the waterfront, as identified in the Richmond Trail Strategy.

2 Study Area

The Phase 2 Study Area includes parts of the West Dike and the North Dike. The West Dike section of the Study Area spans from Williams Road to Terra Nova Rural Park at the Middle Arm of the Fraser River. The North Dike section of the Study Area spans from Terra Nova Rural Park to No. 6 Road.

On the water side of the West Dike is Sturgeon Bank, a provincially designated Wildlife Management Area (WMA) within the Fraser River Estuary. It is comprised primarily of near shore and intertidal brackish marsh, sandflats, mudflats, and open water. It is a protected area for the conservation of critical, internationally significant habitat for year-round migration and wintering waterfowl populations and important fish habitat. The water side of the North Dike includes pockets of mud flat, salt marsh, and eelgrass habitat.


On the land side of the West and North Dikes, Riparian Management Areas (RMA's) are interspersed throughout the Study Area. RMA designated watercourses are wetted the majority of the year and flow into and support fish life in the Fraser River. The City's RMA's have predetermined setbacks of 5 m or 15 m from top of bank to delineate areas that support the form and function of the watercourses. These areas are protected under the provincial Riparian Area Regulation and form

a key component of the City's ENMS. The entire Study Area is also designated Environmentally Sensitive Area (ESA) within the OCP.

For the purposes of evaluating current and future land conditions and recommending appropriate structural adaptations, the Study Area has been broken into thirteen design areas. These areas are based on the planning boundaries established in the OCP for OCP Areas, OCP Sub-Area Plans, and OCP Specific Land Use Maps. The relevant OCP figures showing these areas are provided for reference in *Appendix A*.

The design areas have been delineated using the OCP boundaries to ensure that the recommendations in this Master Plan can be readily integrated with other City guidelines and City planning initiatives. Area specific adaptations are recommended by area, with consideration for special sites within the thirteen design areas. Existing conditions for each design area, as well as future conditions as provided for in the OCP, are described in *Section 2.1*. The design areas within the Study Area are illustrated in *Figure 2*.

Figure 2: Design Areas and OCP Boundaries

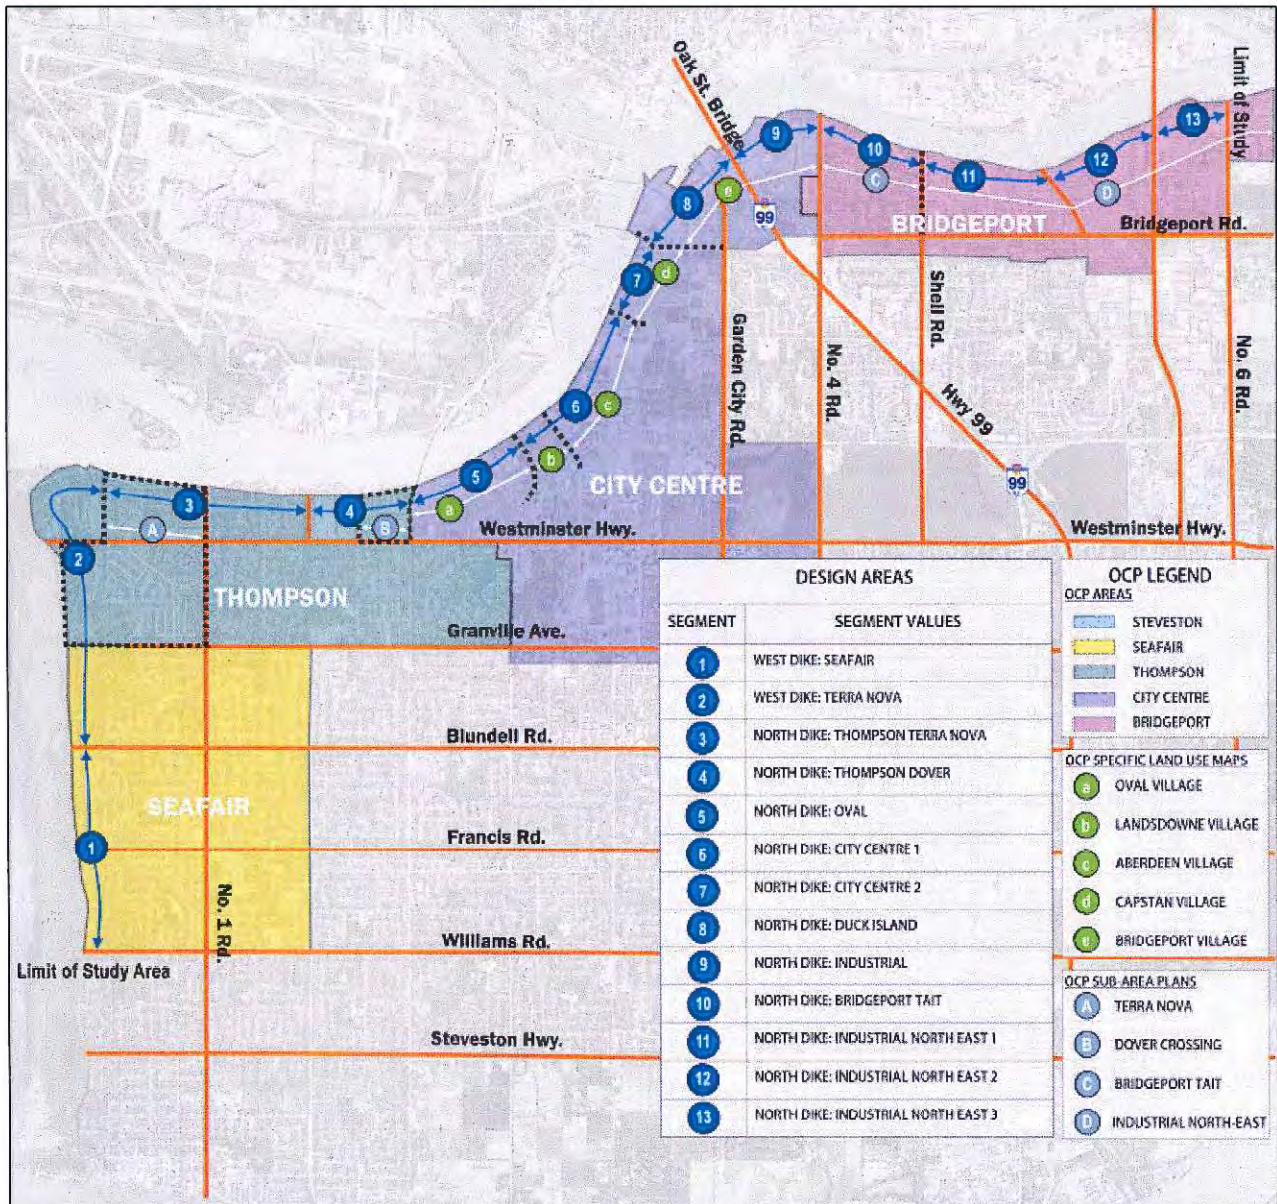

2.1 PRESENT AND FUTURE LAND USE

A brief summary of existing conditions and planned future uses (as outlined in the OCP) for each of the thirteen design areas is provided in **Table 1**. Site conditions or future uses having an anticipated impact on dike planning are discussed in more detail in the discussion of each design area in **Section 4.2**, where the recommended adaptation is presented for each design area.

Table 1: Summary of Existing and Future Conditions

DESIGN AREA	BOUNDARIES	DESCRIPTION OF EXISTING AND FUTURE CONDITIONS PER OCP	
SEAFAIR	Williams Rd to Granville Ave	Existing	Primarily established single family and low-rise residential. Sturgeon Bank is west of the dike. The West Dike Trail is over the dike, with natural areas on either side. The northern third of the plan is the Quilchena Golf & Country Club, situated on Agricultural Land Reserve (ALR) lands. ESA type is Shoreline on the land side and Intertidal on the water side.
		Future	No major changes anticipated.
TERRA NOVA	Granville Ave to Terra Nova Rural Park	Existing	Situated entirely on ALR lands. Primarily open space, with few buildings. Includes Quilchena Golf & Country Club, Terra Nova Rural Park, and agricultural areas. Sturgeon Bank is west of the dike; includes the Grauer Lands, an enhanced habitat site. West Dike Trail continues north. ESA type is Shoreline on the land side and Intertidal on the water side.
		Future	No major changes anticipated.
THOMPSON TERRA NOVA	Terra Nova Rural Park to McCallan Road	Existing	Established residential neighbourhood of single family homes. River Road is substantially offset from the waterfront, with a wide open space from the road to the dike, which includes a trail. Typical park amenities are in the open space, including benches, sign posts and washroom facilities. ESA type is Shoreline on the land side and Intertidal on the water side.
		Future	No major changes anticipated.
THOMPSON DOVER	McCallan Road to No. 2 Rd Bridge	Existing	Half industrial, a City works yard and recycling depot. Half residential neighbourhood of townhouses and medium-density apartment complexes. Buildings are set back from River Road, and built on higher land than the road elevation. No driveway access from River Road to the condo complexes. ESA type is Shoreline on the land side and Intertidal on the water side.
		Future	No major changes anticipated.
OVAL	No. 2 Rd Bridge to Dinsmore Bridge	Existing	Mostly redeveloped in the past fifteen years, with the Olympic Oval, high-rise condos and offices. River Road is realigned behind waterfront development. A waterfront trail and recreational areas are along the waterfront, including intertidal zones and park amenities, such as benches. ESA type is Shoreline on the land side and Intertidal on the water side.
		Future	Development is currently underway for the remaining sites, and nearly complete. These areas are designated for mixed use in the OCP. Retail and other commercial uses will be at the main levels of new developments.
CITY CENTRE 1	Dinsmore Bridge to Cambie Rd	Existing	Low-rise office industrial lands and parking lots. Office sites have substantial footprints. River Road is adjacent to the waterfront. The UBC Boathouse and other marinas are on the water. Along the waterfront there is a thin linear park including a dike trail with park amenities and public art. ESA type is Shoreline on the land side and Intertidal on the water side.
		Future	The area from the waterfront to the former rail corridor is planned to be the proposed Middle Arm Park, a large park surrounded by high density mixed use and commercial uses of the planned Pedestrian-Oriented Retail Precincts. A museum and arts centre are proposed for this area.
CITY CENTRE 2	Cambie Rd to Moray Bridge	Existing	Low-rise office industrial lands and parking lots. Office sites have smaller footprints with narrow frontages on the water. River Road is adjacent to the waterfront, with parking lots along the dike. Marinas are present along this entire area. ESA type is Shoreline on the land side and Intertidal on the water side.
		Future	Intensification of the urban area with high density mixed use and commercial zones in planned Pedestrian-Oriented Retail Precincts. Expansion of marinas for residential and non-residential boats. The proposed Capstan Canada Line Station .

DESIGN AREA	BOUNDARIES		DESCRIPTION OF EXISTING AND FUTURE CONDITIONS PER OCP
DUCK ISLAND	Moray Bridge to Oak St Bridge	Existing	Former industrial lands, currently vacant lots that host the Richmond Night Market during the summer. River Rock Casino & Marina, and large parking lots. A constructed wetland between the parking lot and the marina. Smaller industrial sites west of the Oak Street Bridge. Disused CP Rail bridge. ESA type is Shoreline on the land side and Intertidal on the water side.
		Future	Parklands and marinas along the waterfront. Development of urban commercial and residential uses. A bridge for the Canada Line and a new Skytrain station. NOTE: Private developers are currently submitting development plans to the City for approval.
INDUSTRIAL	Oak St Bridge to No. 4 Rd	Existing	Industrial facilities and parking lots. Fraser River Terminal, BC Hydro power station. Canada Line and Bikeway bridge. River Drive in aligned inland. ESA type is Shoreline on the land side and Intertidal on the water side.
		Future	No major changes anticipated. Industrial lands for the foreseeable future. Residential uses are prohibited.
BRIDGEPORT TAIT	No. 4 Rd to Shell Rd	Existing	Formerly industrial, presently existing high-rise condos; approved condo and townhouses currently under development. River Road at the waterfront was decommissioned on this section. Small light industrial site remains. Single family residential south of the waterfront area. Log booms on the water. ESA type is Shoreline on the land side and Intertidal on the water side.
		Future	Ongoing redevelopment to be completed in the near future. No major changes anticipated once redevelopment is complete.
INDUSTRIAL NORTH EAST 1	Shell Rd to Bath Slough	Existing	Industrial area. Businesses and associated parking lots on the narrow strip of land between River Road and the waterfront. Log booms on the water. ESA type is Shoreline, Intertidal or Freshwater Wetland.
		Future	No major changes anticipated.
INDUSTRIAL NORTH EAST 2	Bath Slough to Knight St Bridge	Existing	Industrial area. Offices and parking lots. River Road is against the waterfront. Large trees and established vegetation on the waterfront area north of River Road. A small vacant lot under Port Metro Vancouver ownership is west of the Knight Street Bridge. Drainage ditches south of River Road. ESA type is Shoreline, Intertidal or Freshwater Wetland.
		Future	No major changes anticipated.
INDUSTRIAL NORTH EAST 3	Knight St Bridge to No. 6 Rd	Existing	Industrial area. Large lumber processing yard and waterfront log transport facilities. Large trees and established vegetation on the waterfront. Public access to River Road is blocked by gates however the City has a ROW. ESA type is Shoreline on the land side and Intertidal on the water side.
		Future	No major changes anticipated.

2.2 GEOTECHNICAL CONDITIONS

Thurber Engineering Ltd (Thurber) conducted a review of the Study Area to assess the anticipated geotechnical conditions. Based on their review, the anticipated subsurface conditions within the Study Area are primarily fill and silt overlying alluvial Fraser River deposits. The silt is clayey near the surface and becomes sandier with depth. This layer is generally about 2 to 4 m thick, although it ranges from about 1 m to 6 m thick. Below the silt, there is a zone that transitions from silt to sand at about 7 m depth. The sand layer below about 7 m depth becomes cleaner and coarser with depth and is typically 8 to 25 m thick. This sand layer is susceptible to seismically induced liquefaction. Below the sand there is a sequence of silt and sand layers. Underlying the silt and sand sequence, there is a thick deposit of silt, which is underlain by dense till-like soil at depths of 50 m or more. Geotechnical investigations and modelling may be required at the design stage of a dike adaptation project to establish site-specific subsurface conditions, and any associated geotechnical requirements.


The report⁵ prepared by Thurber in support of the Phase 2 LIDMP is included as **Attachment 3** for reference.

⁵ Lulu Island Dike Master Plan - Phase 2: Geotechnical Input, Thurber Engineering Ltd., October 6, 2016

2.3 ENVIRONMENTAL CONDITIONS

Richmond is located at the mouth of the Fraser River, an urban and agricultural City juxtaposed within the high ecological values of the Fraser River Estuary. The City’s Ecological Network Management Strategy (ENMS) provides context for the protection, enhancement and connectivity of an interconnected system of natural areas that make up Richmond’s distinctive landscape. The ENMS recognizes the essential ecosystem services integral to the subtidal, intertidal and upland riparian areas within the Study Area, such as water storage and filtration, wave energy attenuation, temperature mitigation and prevention of soil erosion. Green infrastructure, which refers to components of the natural and built environment that provide ecosystem services, are also promoted within the ENMS. A map of Riparian Management Areas (RMA’s) of Lulu Island is shown below in *Figure 3* and provided in full size in *Appendix B*.

Figure 3: Riparian Management Areas (RMA’s)

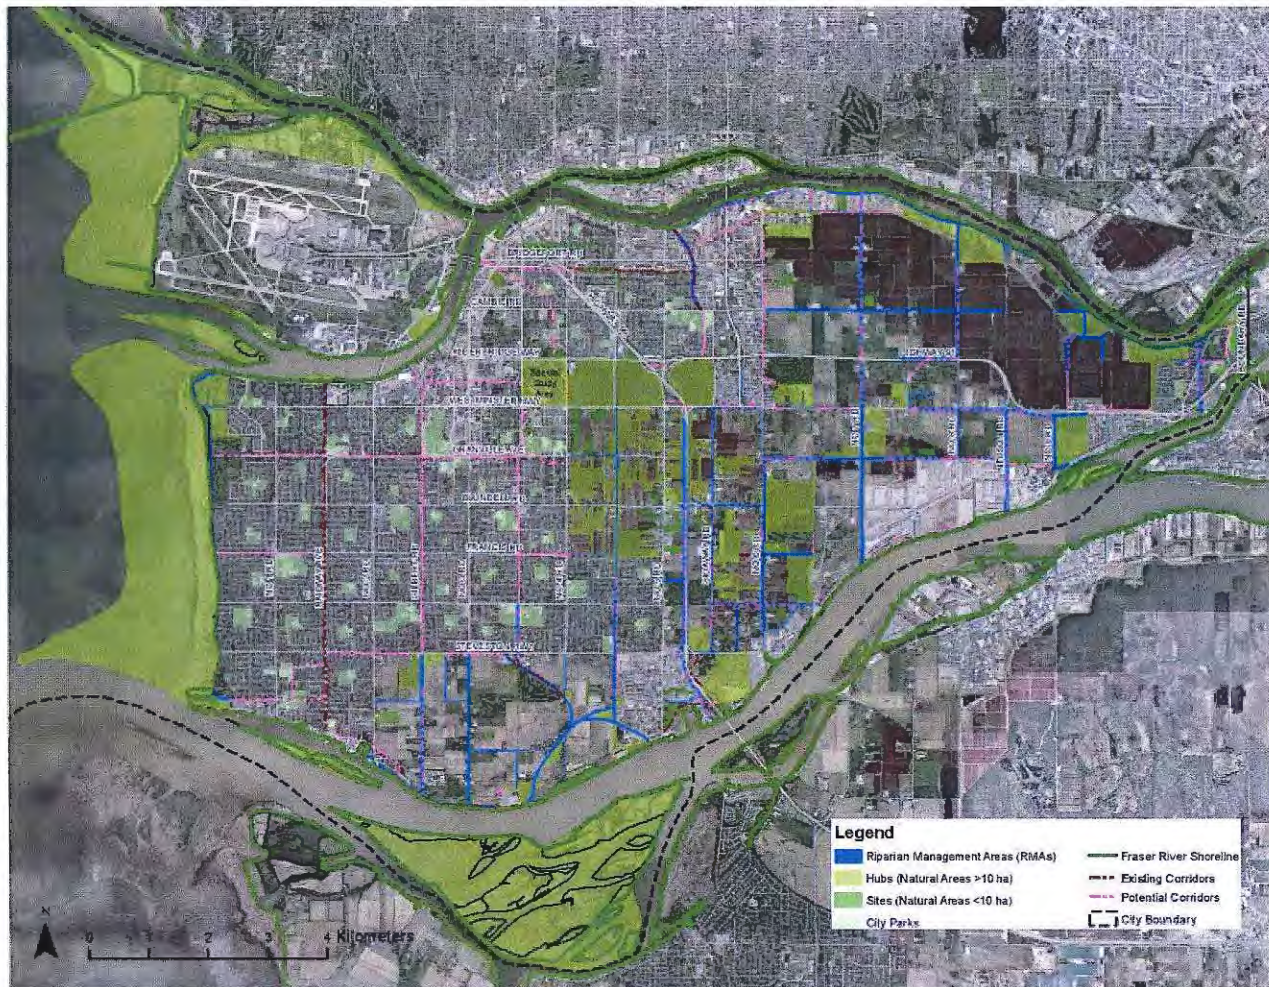

Ecological lands within the LIDMP Study Area include City parks, RMA’s and ESA’s designated in the OCP, as well as other ecologically valuable lands such as the provincially designated Sturgeon Bank WMA. The LIDMP Study Area includes six of the ten geographic strategy areas identified within the ENMS: Traditional Neighbourhoods, City Centre, West Dike, WMA’s, Industrial Area and the Fraser River. The ENMS and associated Strategy Areas inform the LIDMP.

The ENMS encompasses all ecological lands in the City, regardless of tenure. Priorities to reduce the fragmentation of natural habitats is central to the ENMS principles. The LIDMP Study Area includes some of the City’s highest ecological values within the Fraser River delta. An overview of the City and non-City designated ecological attributes within the Study

Area is provided below. Further detail is provided in the Envirowest Technical Brief⁶ included as *Attachment 4* for reference. The following discussion presents environmental factors, regulations and guidance documents in place at the time of this writing. Any additional regulations that may be in place in future at the time that any diking project moves forward should also be reviewed and considered in the preparation of dike design and construction plans.

Riparian Management Areas (RMA's) and Channelized Watercourses

Richmond has interconnected drainage catchments that are delineated by the operation of pump stations that discharge into the Fraser River. The inland watercourses are slow moving and wetted the majority of the time. The high groundwater table that feeds local watercourses and sloughs contains naturally-occurring dissolved iron and other metals, and low levels of dissolved oxygen. These water quality conditions are generally inhospitable to salmon and trout; however, other species of fish, reptiles and amphibians may utilize the inland aquatic areas.

The City's watercourses flow into and contribute to fish and wildlife resources sustained by the Fraser River. As such the watercourses are designated fish habitat under the federal Fisheries Act, the provincial Water Sustainability Act, and the provincial Riparian Areas Protection Act. While the majority of these watercourses have been historically realigned into road grid to support agricultural development, they are identified by the City as channelized watercourses and not stormwater ditches. To support the form and function of these channelized watercourses, pre-designated riparian setbacks of 5 m and 15 m are designated by the City on minor and major watercourses, respectively. These setbacks, developed in consultation with the Department of Fisheries and Oceans (DFO), are identified by the City as Riparian Management Areas (RMA's) and protected from development. Channelized watercourses, and their associated RMA's, are interspersed on the landside of the West and North dikes within the LIDMP Study Area. Locations of RMA's are shown on the map included in *Appendix B*.

Environmentally Sensitive Areas

The City has designated Environmentally Sensitive Areas (ESA's) throughout the City. As identified in Chapter 9 of the OCP, intertidal and shoreline ESA Development Permit (DP) areas are in place around the Lulu Island perimeter. The intertidal DP area is defined as 30 m out into the intertidal or subtidal area measured from the High Water Mark as defined in the Riparian Area Regulations. The shoreline DP area is defined as 30 m inland of the shoreline into upland riparian habitat. This ESA recognizes the estuarine values surrounding Lulu Island and provide direction for application of the DP through DP permit guidelines. Along the West Dike section of the Study Area, ESA DP areas contain upland riparian, brackish marsh, sandflats, mudflats, and open water habitat. Along the North Dike section of the Study Area, ESA DP areas contain pockets of mud flat, salt marsh, eelgrass and upland riparian habitat. This ESA recognizes the estuarine values surrounding Richmond and provides direction for application of the DP through DP permit guidelines. Along the West Dike section of the LIDMP Study Area, the ESA Development Permit Area contains upland riparian, brackish marsh, sandflats, mudflats, and open water habitat. Along the North Dike section of the LIDMP Study Area, the ESA Development Permit Area contains pockets of mud flats, salt marsh, eelgrass and upland riparian habitat. Locations of ESA's are shown on the map included in *Appendix C*.

City Parks

The West Dyke Trail and Terra Nova Rural Park are both City park attributes contained within the Study Area. There is habitat functionality and ecological value comprised within these lands.

Bath Slough

The Study Area includes Bath Slough at the boundary between the Industrial North East 1 and Industrial North East 2 design areas. Bath Slough forms part of the historical watercourse complex that stretched across Lulu Island, and receives run-off from industrial and residential lands in the Bridgeport area. Through the 2014 Bath Slough Revitalization Initiative, the City has conducted a number of innovative ecological initiatives along Bath Slough including water quality improvements, riparian enhancements and native pollinator pasture initiatives. The Bath Slough Revitalization Initiative should be considered in the design and construction phase of proposed dike upgrade projects in this area.

⁶ Lulu Island Dike Master Plan Phase 2: Technical Brief, Envirowest Consultants, November 2, 2016.

Ecological Network Management Strategy (ENMS) Strategy Areas

Both inland and foreshore ecological values are embedded within the six ENMS Strategy Areas. The ENMS and associated Strategy Areas provide key ecological context within the Study Area. ENMS Strategy Areas as shown on the map included in *Appendix D*.

Wildlife Management Area (WMA) – Sturgeon Bank

Sturgeon Bank is a provincially designated Wildlife Management Area (WMA) established in 1998 and is located on the water side of the West Dike. It is protected for the conservation of critical, internationally-significant habitat for year-round bird migration and wintering waterfowl populations. It is also important fish habitat. It is comprised primarily of near shore and intertidal brackish marsh, sandflats, mudflats, and open water. The WMA foreshore marsh and mudflat habitats provide critical ecological values as well as ecosystem services for wave energy attenuation and shoreline erosion and stabilization. Consideration for these key climate change adaptation and resiliency attributes along Sturgeon Bank should be considered in the design and construction phase of proposed dike upgrade projects in this area.

Fraser River Estuary Management Program (FREMP) Mapping

Since the mid-1980’s habitat productivity mapping has been undertaken along the Fraser River shoreline from the mouth of the Fraser River Delta upstream to the Pitt River/Maple Ridge area. This mapping was undertaken by the former Fraser River Estuary Management Program (FREMP). FREMP was a cooperative agreement amongst member agencies, including Environment Canada, Fisheries and Oceans Canada, Transport Canada, Fraser River Port Authority, North Fraser Port Authority, BC Ministry of Environment, and the Greater Vancouver Regional District. Though FREMP ceased to exist in 2013, the City continues to utilize this data resource to inform activities in and along the City’s Fraser River foreshore. The FREMP classification system comprises a three tiered colour-coded system: habitats are colour-coded red, yellow or green. Red-coded shorelines sustain highly productive fish and wildlife habitats. Yellow-coded shorelines sustained moderately productive habitats, while green-coded shorelines were characterized by habitats of low productivity. Generally development constraints are greatest within red-coded habitats, while development within green-coded habitats are constrained the least. Habitat productivity within the LIDMP Study Area includes a majority of red-coded reaches along the West Dike and North Arm.

Detailed maps showing habitat coding throughout the Study Area are presented in *Appendix E*. An overview of the foreshore habitat coding in the Study Area is shown in *Figure 4*. High productivity habitat is depicted to extend along the north dike generally from No. 6 Road to the Knight Street bridge, along the Tait Waterfront Park, from No.4 Road to the Canada Line bridge, under the Oak Street Bridge, immediately west of the River Rock casino, south of the Canada Line YVR line, and west of Hollybridge Way to the Terra Nova Rural Park. Moderate and low productive habitat are interspersed along this shoreline between Hollybridge Way and Knight Street bridge. High productivity habitat is depicted to extend along the entire seaward edge of the west dike fronting Sturgeon Bank and Terra Nova Rural Park.

Fraser River Fish and Species at Risk Values

The Fraser River Estuary contains rich habitat for many species of fish and wildlife. Estuary marshes support a significant portion of the regions migrating salmon. While the inland watercourses are generally considered to not be hospitable to salmon and trout species, they do flow into and support fish life in the Fraser River and are therefore considered to be nutrient providing fish habitat.

A desktop review for species of management concern (i.e. included in Schedule 1 of the Federal Species at Risk Act, and Provincial Conservation Data Centre red- and blue-listed species) was undertaken on the Provincial Conservation Data Centre web map. The search provided a single result, specifically utilization of the Fraser River by white sturgeon. The search did not provide any results along the seaward extent of the west dike, or along inland channelized watercourses . The absence of search results does not indicate that species at risk or of management concern are absent, but that they have either not been observed and /or recorded within these areas. A detailed species at risk assessment will need to be undertaken at the time of design construction as the potential for listed species such as white sturgeon, Vancouver Island beggertick, streambank lupin etc. within the Study Area is high.

Figure 4: Foreshore Habitat Coding in the Study Area



2.4 EXISTING FLOOD PROTECTION INFRASTRUCTURE

At present, Lulu Island is protected from flood hazards by a perimeter ring dike consisting of the West Dike, the North Dike, and the South Dike. The Study Area comprises the waterfront and lands protected by the West Dike, and part of the North Dike from Terra Nova Rural Park to No. 6 Road. These dikes provide flood protection from storm surges and Fraser River freshet events. Generally the dike is a standard trapezoidal earth dike in most locations, with a trail or a road over the dike crest.

The existing dike crest elevations in the Study Area vary from 3.0 m to 4.7 m depending on when the dike was last upgraded, or when surrounding lands were last redeveloped. Drainage ditches and storm sewers behind the dikes convey storm flows and flood waters to pump stations discharging to the Fraser River and the Georgia Strait. Public dikes and all drainage infrastructure are now owned solely by the City of Richmond.

The West Dike protects the City from high tides and storm surges originating in the Strait of Georgia. Sturgeon Bank, a mudflat and marshland, extends up to 6 km into the Strait of Georgia from the toe of the dike. These lands consist of a relatively flat face with grass cover next to the dike, then marsh and mudflats further out towards the sea. Sturgeon Bank currently provides some protection from wave run-up to the West Dike.

The North Dike protects the City from high tides and storm surge impacts originating in the Strait of Georgia and migrating up the North and Middle Arms of the Fraser River. To a lesser extent, these dikes protect from high Fraser River freshet events. Generally the North Dike is bounded by the Fraser River foreshore and River Road. Through the City Center OCP Area, the dike is primarily a linear park on the waterfront bounded on the land side by River Road or development. Waterfront developments that have been constructed in the past ten years have often elected to raise their lands to the

dike crest elevation, forming a superdike. A superdike is formed whenever the lands behind the dike are filled to the same elevation as the dike crest, and development is built on a ground elevation equal to the dike crest. Superdikes are discussed in greater detail in *Section 4.1.2*. Through the industrial areas north of the City Center, the dike remains generally earthfill with sections of sheet pile and floodwalls associated with specific sites.

2.5 EXISTING FLOOD PROTECTION POLICY

The City of Richmond has two primary policies in place that guide flood protection initiatives. The OCP establishes flood protection as a priority in the context of land use planning. Flood proofing objectives are enforced through Bylaw No. 8204.

At present, the OCP states that ESA's serve the dual purpose of planning for environmental and flood protection needs. Flood protection has been established as a priority alongside environmental priorities within the OCP, especially in areas that are designated ESA's. This includes the entire waterfront of the Study Area. The OCP also establishes a priority for a green infrastructure network throughout the City's ecological network, including the intertidal, shoreline and upland riparian areas. A green infrastructure network integrates the built and natural environment to realize associated ecosystem services such as flood mitigation, and stormwater management.

The City currently enforces flood proofing through the Flood Plain Designation and Protection Bylaw No. 8204, established in 2008 to set minimum Flood Construction Levels (FCL's) throughout the City. The FCL prescribes the minimum elevation where the underside of a floor system can be constructed. The By-law also provides for diking needs such as ROWs by specifying that lands at a certain distance from the dike or waterfront must be dedicated to dike works.

Proposed developments at the waterfront must commit to implementing flood protection measures in order to secure approval for development plans. These are typically negotiated with the City on a site-by-site basis. In recent years, residential developers have voluntarily raised the elevation of development lands to the same elevation as the dike crest (creating a superdike) to ensure that the units on the ground floor will have a view of the water.

3 Considerations

The considerations in this section were used to evaluate potential flood protection adaptations to make the recommendations that comprise the Phase 2 LIDMP. Any flood protection adaptation, whether in compliance with or deviating from the Phase 2 LIDMP, should use the following considerations in evaluating the suitability of a proposed flood protection project for implementation. It is important that any proposed project avoid or mitigate negative impacts, while maximizing the benefits, as a balance of the following considerations. In the event that a dike adaptation project differs from the recommended adaptation for that design area, the project should still take these considerations into account. These considerations outline important factors that should be incorporated into the implementation plans for both structural adaptations that will alter the existing landscape, or policy adaptations that have indirect impacts on the landscape.

3.1 FLOOD PROTECTION CONSIDERATIONS

The City has established a design crest elevation of 4.7 m with consideration to be further raised to 5.5 m in response to climate change and sea level rise predictions. These design crest elevations have been adopted by the City in response to a combination of sea level rise predictions (1.0 m) and land subsidence (0.2 m)⁷, anticipated to materialize by the year 2100.

Increases in dike crest levels (up to 4.7 or future 5.5 m) to address sea level rise and climate change are anticipated to be staged and implemented over the next few decades to respond to rising sea levels. The City will continue to monitor sea level rise and adjust the target dike crest elevations as required. Any flood protection project in the Study Area should, at

⁷ Sea Level Rise Adaptation Primer, Arlington Group et. al, January 2013

a minimum, adhere to these elevations. Additional regional guidelines should also be considered at the design stage of dike improvements.

Adaptations should be compatible with existing dikes and other flood protection measures adjoining the site of proposed works. Connections to existing flood protection works should be designed to ensure there will not be inconsistencies or weak points where an adaptation meets a pre-existing dike.

3.2 ENVIRONMENTAL CONSIDERATIONS

The Study Area is situated along the Georgia Strait and the Fraser River, two important fish and wildlife habitats. There are also riparian areas and intertidal zones that have ecological value. Any diking projects should be well-integrated with the surrounding natural realm, and should be designed to mitigate alterations that compromise the local environment, either aesthetically or ecologically. The Study Area includes substantial open space and parklands, including wetlands and natural areas on the waterfront. The City has an interest in preserving the environment at the waterfront for public uses, in particular the dike trail for cyclists and pedestrians. The aesthetic value of the natural environment along the trails should be considered as well as ecological significance.

The breadth of ecological values comprised within the study area is reflective of estuary habitats as described in *Section 2.3*. The perimeter ring dike in the Study Area is flanked by either riparian or upland ESA habitat to the landside, and high value shoreline & intertidal ESA or WMA habitats on the foreshore. Any proposed dike design and construction projects should undertake an assessment of the adjacent ecological values to determine the most appropriate dike design and footprint using an approach to avoid alterations in high value habitats, and if that is not feasible, then mitigate or compensate with a net gain approach. The Study Area is comprised of large tracts of open space and park lands that contribute significant aesthetic values within the estuary which must be considered in concert with the ecological values.

An overview of the federal and provincial regulatory context is provided above in *Section 2.3*. Detrimental impacts to the environment are to be avoided wherever possible, in accordance with the City's environmental regulations. In addition, sea level rise should be monitored and reviewed in order to determine the impact on existing foreshore wetlands within the Study Area. Additional guidance documents outlining the City's environmental protection and enhancement strategies are listed in *Section 1.3*. Any flood protection project should be prepared by qualified persons having reviewed and understood these documents, as well as any environmental guidance documents or regulations in effect at the time a project is proposed. The design of proposed diking projects should follow the City's approach regarding the priority to avoid habitat impact first. Where that is not feasible, enhancement and mitigation may be pursued with a net gain approach.

3.3 GEOTECHNICAL CONSIDERATIONS

Geotechnical design considerations for dike adaptations include seepage control both under and through the dike, dike slope stability, dike crest settlement, and seismic performance. Furthermore, additional loading from increased dike size over any existing structures, such as building footings or bridge abutments, will need to be verified for confirmation that existing infrastructure will not be negatively impacted. Other types of structural flood protection measures will also need to be verified for impacts to existing infrastructure.

Thurber has reviewed the existing geotechnical conditions in the Study Area. Their comments on the key design considerations are outlined on the following pages.

Seepage

Seepage risk should be assessed and mitigated for any dike adaptation project, whether for dikes or floodwall systems. Seepage becomes problematic where water flow through or under the dike dislocates the fill materials forming the dike, which may weaken the integrity of the dike and increase the risk of failure during high water events. Adaptations should be designed with proper drainage to mitigate seepage risks.

Increasing the height of an existing dike to 4.7 m or 5.5 m may increase the design flood height, defined as the height from the ground at the land side toe of the dike to the height of water against the dike during a high water event. Existing dikes

are between 3.0 m and 4.7 m, and the ground elevation on the landside of the dikes is generally at about 2.0 m. Raising an existing dike may also increase the flood height, unless the lands adjacent to the dike are also raised in conjunction with crest height increases, forming a superdike. Increasing the flood height may increase risks of landside heave of the less permeable surficial silt layer, and piping through the dike or its foundation.

Piping occurs when excessive seepage forces cause the migration of soil particles through the soil matrix resulting in internal erosion and eventually retrogressive failure. Heave can occur when there are excessive hydraulic pressures on the landside of the dike caused by a lower permeability soil layer forming a cap over a more permeable layer near the ground surface. Heave can lift and fracture the cap, causing large localised seepage volumes and internal erosion, which could cause a dike breach.

To provide reliable protection from higher design flood heights, a system of seepage control measures will likely be required for any dike adaptation project. The potential for heave and piping may be mitigated using relief wells, drainage blankets or trenches to drain water from behind the dike face to an outlet such as a sewer or ditch. The receiving system's capacity should be verified to ensure drainage can be accommodated in the system. Relief wells and trenches should be designed with filters, such as a geotextile, to prevent piping and internal erosion. Seepage exits should be similarly protected with filters to minimize risk of fill materials migrating out of the dike.

Where there are ditches at the toe of an existing dike, filling the ditches may be considered within the scope of a proposed dike adaptation project. Ditches at the toe of a dike increase the risk of piping, since these ditches shorten the seepage path length and increase the hydraulic gradient. Filling the ditches may contribute to a comprehensive plan to reduce the risk of seepage.

Seepage potential should be evaluated and mitigated for any structural adaptation, as seepage may cause build-up of pressures behind the structure that may increase risks of failure. Constrained dikes, designed with a retaining wall on one or both sides, may be less susceptible to seepage risk if the dike face is a uniform material, such as a concrete cut-off wall or a floodwall. A dike face constructed with a segmental wall system, such as lock blocks or armour stone, may need to have the joints between segments grouted to prevent seepage at the joints.

Stability

Any dike adaptation project should be designed and constructed to withstand pressures and forces it may be subjected to during a high water event. For dike adaptations, high quality dike fill materials should be used and placed in accordance with accepted engineering practice to maximize stability. The standard dike section is anticipated to be generally stable with increased flood heights, although it will be less stable than the lower height configuration. In areas where stability is a concern, minor modifications to the standard dike section may be required, such as flattening the landside slope, constructing a toe berm or providing a seepage cut-off and filter within the dike. The stability of dikes may be further improved where ditches at the landside toe are infilled.

Settlement

Any dike adaptation project should be designed and constructed with consideration for settlement. Designs that minimize settlement are preferred, though some measure of settlement is anticipated in the long-term in all cases.

Raising existing dikes may induce consolidation settlement of the surficial silt layers. This settlement could be up to about 5% of the increase of the thickness of new dike fill placed. Dikes and surrounding areas may also experience compression settlement due to on-going long-term compression of deeper silt layers. This ongoing settlement is typically in the range of 1 to 2 mm per year for dikes built on soil conditions in Richmond. Settlement could potentially be compensated for by overbuilding the dike to a higher initial crest elevation, anticipating that it will settle to the target dike crest.

Local soil properties should be investigated prior to finalizing the design of any adaptations. Where construction is over peat or highly organic soils, settlement may be higher.

Seismic Performance

The Provincial Seismic Design Guidelines for Dikes⁸ (Seismic Guidelines) published in June 2014 recommends designing high consequence dikes to control seismic deformations within prescribed limits. For a trapezoidal dike to achieve the objectives of the Seismic Guidelines, ground improvement may be required. Ground improvement reduces seismic vulnerability by densifying the foundation of the dike. Compaction of the ground underlying the dike may achieve the targets in the Seismic Guidelines. However, more intensive methods such as deep soil mixing or vibro-replacement to a specified depth may be pursued if compaction alone is found to be insufficient. These ground improvements may be very costly. Dikes that are set back from the waterfront are more resistant to seismic events due to being restrained by earth at both dike toes, as compared to a waterfront dike where the waterside toe is much deeper and may provide less force anchoring the dike in place. Therefore, setback dikes require less intensive methods to meet the Seismic Guidelines. Likewise, widening the dike crest to create a superdike increases resilience to seismic events without typically requiring ground improvements. Superdikes are discussed in greater detail in *Section 4.1.2*.

To further understand the potential seismic risks to dikes within the Study Area, Thurber conducted seismic deformation analyses at three select locations (No. 1 Road Pump Station, No. 4 Road Pump Station, and Bath Slough Pump Station). Results are included in their Seismic Deformation Analysis report⁹ included in *Attachment 5*. Results from the assessment identified that at the three sites selected, horizontal deformations were within the allowances prescribed for the 1:2,475 year event by the Seismic Guidelines. Vertical deformations exceeded the tolerances; however, overbuilding the dike to provide post-earthquake freeboard may be an acceptable alternate to meet the Seismic Guidelines instead of costly ground improvements. The results are largely depended on the underlying soil conditions, slope of the riverbank, and depth of the river bottom. Larger deformations could be expected where the river channel is deeper and steeper. The results discussed in the Seismic Deformation Analysis pertain only to the three sections analyzed; these are generally representative of Lulu Island however the results cannot be assumed to be consistent for any other locations. At the design stage of a proposed dike adaptation project, a site-specific seismic deformation analysis should be conducted to confirm seismic risks, and possible mitigation requirements. A seismic deformation analysis, for example a Plaxis model, may inform whether ground improvements may be required, and what level of ground improvements may be required to meet the Seismic Guidelines.

3.4 INFRASTRUCTURE CONSIDERATIONS

It is advantageous to pursue dike works alongside other infrastructure upgrades in the vicinity of the dike. Where infrastructure works are proposed on the waterfront, local diking needs should be evaluated and included in the scope of proposed work wherever possible. For example, when a road is being raised or resurfaced, the adjacent dike could be upgraded concurrently. Including dike adaptations within the scope of other municipal works may also present a cost savings as compared to pursuing projects independently. The resulting dikes may also be better integrated with the local landscape if they proceed concurrently with neighbouring infrastructure upgrades.

Any impacts to local stormwater drainage patterns should be evaluated to ensure compatibility with the local infrastructure, such as pump stations or roads. Where adaptations will interfere with existing drainage patterns, the capacity of the receiving pump station must be confirmed. If ditches at the toe of the dike are to be filled, the associated loss of stormwater storage and conveyance functions may need to be compensated with underground pipes or alternative systems.

Above ground utilities may be impacted by diking projects. Utility poles may need to be temporarily relocated while dike works are underway, and relocated to a permanent position when works are complete. There may be an opportunity to relocate cables underground when dike works proceed, particularly if roadworks are included. The dike trail and associate park infrastructure, such as park benches and lookouts, may need to be relocated to accommodate dike adaptations.

⁸ Seismic Design Guidelines for Dikes, 2nd ed., Golder, Ministry of Forests Lands and Natural Resources (MFLNRO) Flood Safety Section, Jun 2014

⁹ Lulu Island Dike Master Plan - Phase 2: Seismic Deformation Analysis, Thurber Engineering Ltd., Sep 12, 2016

3.5 SITES WITH UNIQUE CONSTRAINTS

There may be sites with unique features that must be accommodated when adaptations proceed. Dike adaptations may be realigned to avoid special sites, however this may not always be feasible. Where development and infrastructure exists along the waterfront where a dike adaptation project would ideally proceed, a custom design to accommodate that site may be required. Examples include pump stations, bridges, or industrial sites located immediately on the water. There are a number of bridges in the Study Area. Adaptations at bridge sites are discussed further under *Section 4.3*.

The adjoining adaptations on either side of the special site should be well-integrated with that site's custom adaptation design, to ensure there are no vulnerabilities in the flood protection strategy at the boundaries between adaptation types. For example, a section of floodwall within a dike should be protected at the joints to ensure the joints are as robust as both the dike and floodwall. The joints should be as capable of withstanding high water levels as the adaptations on either side.

3.6 SOCIAL CONSIDERATIONS

Dike adaptations should be designed with consideration of the public realm. The City's 2009 Waterfront Strategy presents a vision that promotes community wellness, economic vitality and a healthy environment through initiatives that integrate the waterfront with the urban landscape. The Study Area contains recreation, culture and heritage resources to be preserved wherever feasible, according to the regulatory protections in place for heritage resources. Recreational uses may include walking and cycling on the trail, as well as offshore activities such as sport fishing and boating.

Heritage sites may be treated as sites with unique constraints, as described in *Section 3.5*, that require special accommodations within a dike project. Heritage sites that have been identified as culturally significant should be preserved per the Heritage Procedures Bylaw 8400 as applicable.

Any impacts that restrict use and enjoyment of the waterfront, as well as views of the waterfront, should be mitigated. Impacts on cultural and heritage resources limiting the accessibility of these sites should be mitigated. Sites should remain accessible to all people including those using mobility aids, such as wheelchairs or crutches.

Public access to the waterfront is provided by the perimeter dike trail system. Where waterfront access is constrained, the City's Parks Planning and Design (Parks) department has identified connectivity at the waterfront as preferable to inland trail detours. For example, where the existing dike trail alignment crosses under low bridges, raising the dike may not provide adequate clearance to maintain the trail over the dike. The preference is to keep the trail at the waterfront. A boardwalk at the waterside toe of the dike would be a preferred approach as opposed to directing pedestrians up to the road to circumvent a barrier.

Adaptations should be aesthetically integrated with the surrounding area. For example, in recreational areas or ecological landscapes, adaptations that do not detract from the natural beauty of the local environment are preferable to those adaptations requiring severe hardscaping, such as concrete or retaining walls. The local character of industrial areas is amenable to man-made structures thus floodwalls may be in keeping with the landscape themes in industrial areas.

Adaptations should support, and be integrated with, the habitat functionality and aesthetics of the surrounding environment.

3.7 PROPERTY CONSIDERATIONS

The City must have permanent access to the dike adaptations in the long-term, for both construction and ongoing maintenance operations. Acquiring property may add considerable costs to a dike project. Wherever feasible, adaptations should proceed within the lands that are already under City ownership, or that the City may access through easements or right-of-ways (ROW's).

Much of the City's waterfront was developed prior to the establishment of robust policies for dedicating lands to dike. As a result, older buildings remain directly on the waterfront, or within 30 m from the natural boundary. In cases where no alternative alignment can be implemented, it may be necessary for the City to acquire waterfront lands or obtain easements or ROWs to construct or maintain adaptations.

3.8 ECONOMIC CONSIDERATIONS

For the purposes of the Phase 2 LIDMP, economic considerations encompass impacts to local businesses operating in the vicinity of existing or proposed dikes. The cost of adaptation projects is also an economic consideration, however for the purposes of the Phase 2 LIDMP these will be referred to as “cost considerations,” discussed further under *Section 3.10*.

Flood protection projects provide an overall economic good by preventing damage to assets. However, any changes to existing conditions may trigger negative impacts to the local economy. For example, diking may damage views to the waterfront, or challenge industrial activities by limiting water access.

Where economic impacts cannot be completely avoided, they should be mitigated to the extent feasible. Dike adaptations should consider local economic factors in the overall decision making context.

Lands that were formerly used for economic purposes, such as waterfront shipping facilities, but are no longer being used for economic activities may be suitable lands for dike adaptations. If alternative lands are available that do not have any associated economic uses, those lands should be used rather than compromising lands of economic interest.

3.9 OPERATIONAL CONSIDERATIONS

Dikes in the Study Area provide access to City assets that must be maintained, such as drainage ditches and trails. Adequate clearance must be retained for maintenance vehicles to navigate the dikes where required, and carry out maintenance activities. For example, if a dike is raised in an area where there are drainage ditches at the dike toe, the boom of an excavator on the dike must be able to reach the ditches for cleaning and maintenance.

Raising a dike may complicate access as the slopes must remain suitable for maintenance and emergency access. Additional lands may be required to improve access to the dike.

3.10 COST CONSIDERATIONS

The overall cost of implementing adaptations is driven by a number of factors that include habitat consideration, land acquisition and ground improvements. When evaluating the cost of an adaptation, the costs of all associated works and mitigation plans should be included. A project with relatively higher construction costs may still be the least expensive option if it does not require any habitat compensation, for example.

4 Flood Risk Management Adaptations

Flood Risk Management adaptations have been categorized as either area wide or area specific.

Ultimately the City’s goal is to fortify the perimeter ring dike to a design crest elevation of 4.7 m, with consideration to be further raised to 5.5 m in response to climate change and sea level rise predictions. Area wide adaptations are those that facilitate the City’s flood protection objectives in tandem with the dikes or alternative protection measures in place at the waterfront. These could be policy adaptations, structural measures, or enhancement of green infrastructure to secure additional benefits to an adaptation that will achieve the 4.7 m crest elevation. Area wide adaptations may not be sufficient to meet the City’s target dike crest elevation if implemented in isolation, however they may facilitate achieving the City’s flood protection goals. For example, revising City policies to include specific diking requirements would be an area wide adaptation, as this is applicable across the entire Study Area, however, on its own, a revision to City policy would not achieve the target dike crest elevation. Area wide adaptations encompass strategies to facilitate implementing flood protection projects, and seizing opportunities presented by waterfront development to implement flood protection works concurrently. Area wide adaptations are defined and described in further detail in *Section 4.1*.

Area specific adaptations are recommended for each of the thirteen specified design areas. These include all dike and floodwall adaptations that may achieve the 4.7 m design crest, and may be further raised to 5.5 m in future when required. As noted in *Section 2*, the design areas have been delineated using the City’s Official Community Plan (OCP) boundaries

as identified in the OCP Areas, OCP Land Use Maps and OCP Sub-Area Plans. OCP Areas have been subdivided where similar waterfront conditions exist for a clearly defined part of an area. Area specific adaptations are defined and described in further detail in **Section 4.2**.

Recommendations from both area wide and area specific categories have been made to create a comprehensive flood protection strategy for the Study Area. A summary of the recommended Flood Risk Management Strategies that apply to either specific design areas, or all of the Study Area is provided in **Table 2**. The contexts for the recommended application of each adaptation are detailed in **Section 4.1** and **Section 4.2**.

Table 2: Recommended Flood Risk Management Strategies

AREA SPECIFIC				AREA WIDE				
DIKES		FLOODWALLS						
Widen Footprint to Land or Water Side	Raise in Place / Constrained Dike	Permanent	Demountable	Superdikes	Flood Proofing	Planning and Development Controls	Breakwaters and Barrier Islands	Secondary Dikes

Note that other adaptations were reviewed and evaluated for implementation in the Study Area, though only the recommended adaptations are presented in the Phase 2 LIDMP. Adaptations that were eliminated at the evaluation phase include coastal wetlands, emergency preparedness and response, and managed retreated.

Coastal Wetlands: Coastal wetlands, including intertidal habitat such as brackish wetlands, eelgrass beds, mud flats, and sandflats, temper the extremity of storm impacts by attenuating wave energy, similar to breakwaters. There are no candidate sites within the Study Area to create new coastal wetlands for the purposes of flood protection; however, existing coastal wetlands can be maintained and enhanced to improve their flood protection characteristics.

The West Dike runs adjacent to the Sturgeon Bank WMA which is comprised of intertidal brackish marsh, sandflats, mudflats, and open water. The North Dike runs adjacent to pockets of mud flat, salt marsh, and eelgrass habitat. This intertidal habitat currently provides ecosystem services such as erosion and wave attenuation. Where feasible through dike upgrades this intertidal habitat could be enhanced. As part of the LIDMP the City will need to continue to work with inter-jurisdictional partners to monitor the complexity of the surrounding intertidal habitat, evaluate the existing ecosystems services that this habitat provides, and based on monitoring collaborate of efforts and initiatives to maintain and enhance this area.

Emergency Preparedness and Response: This strategy accommodates flood risks by preparing robust mitigation plans, to be carried out in the event of flood emergencies. The City has an existing emergency response plan: the Emergency Operations Centre coordinates with various departments to execute the Emergency Preparedness Flood Management Plan. The plans in place have not been reviewed as part of the Phase 2 LIDMP as this is beyond the scope of this study.

Managed Retreat: Managed retreat involves decommissioning or demolishing existing assets within a specified hazard zone, thereby eliminating flood risk by removing any development where flooding may occur. This strategy is not appropriate for the Study Area. The economic value of retaining existing

assets exceeds the cost of reducing the risk of flood damage by relocating assets. The existence of development on Lulu Island that must be protected from flooding is considered a permanent condition for the purposes of the LIDMP.

4.1 AREA WIDE ADAPTATIONS

In the context of the Phase 2 LIDMP, area wide adaptations are those that facilitate the City’s flood protection objectives in tandem with the dikes or alternative protection measures in place at the waterfront, but may not be sufficient to meet the City’s target dike crest elevation in isolation. The target dike crest elevation is addressed through the area specific adaptations described in *Section 4.2*.

The recommended area wide adaptations are: superdikes; floodproofing; planning and development controls; breakwaters and barrier islands; and, secondary dikes,. Each recommended adaptation is discussed in the following sections.

4.1.1 SUPERDIKES

As noted in *Section 2.4*, a superdike is formed where the lands behind the dike are filled to the same elevation as the dike crest. Development is then built on a ground elevation equal to the dike crest.

Maximizing the width of raised land adjacent to the river decreases flood and seismic risks by increasing the integrity of the dike. The existing dikes of Lulu Island are built on soft soils that are subject to liquefaction during seismic events. These dikes may require ground improvements to meet the 2014 Seismic Design Guidelines (Seismic Guidelines). Superdikes are an approach to achieve the dual objectives of reducing vulnerability to both high water levels and seismic events. A superdike is more likely to withstand lateral movement and sloughing of the dike face without resulting in a dike breach, as compared to a standard trapezoidal dike alone. By raising lands to a superdike condition, costly ground improvements may not be required, even if they may have been required for a standard trapezoidal dike in the same area.

Any proposed dike adaptation project should comply with the Seismic Guidelines. If a proposed dike adaptation project will not meet the requirements in the Seismic Guidelines, superdikes may be considered as an alternative to ground improvements. At the design stage, a number of strategies should be investigated to determine which will meet the Seismic Guidelines at the lowest cost, on the overall balance of the considerations listed in *Section 3*.


Any redevelopment of waterfront sites presents an opportunity to fortify existing flood protection measures. Although the Study Area is already fully built out, lands will continue to be redeveloped over the long-term future. Opportunities for implementing superdikes are most attainable where existing commercial and industrial sites are leveled in support of developing residential uses. Generally, industrial sites have different waterfront access and aesthetic needs than residential sites, which benefit most from a superdike condition. In recent years, residential developers have voluntarily raised the ground elevation of development sites to the same elevation as the dike crest to ensure that the units on the ground floor will have a view of the water. Within the Study Area, this has been the case at the multi-family residential developments next to the Olympic Oval, and the multi-family residential development under construction on the formerly industrial waterfront sites between No. 4 Road and Shell Road.

Application: Commercial & Residential Lands on the North Dike

The lands of the City Centre area are anticipated to experience extensive intensification and redevelopment in the coming years, further detailed in *Section 4.2.7* and *Section 4.2.8*. This area has been identified as a candidate for superdikes, as shown in *Figure 5*.

Redevelopment of waterfront sites presents opportunities to implement flood protection works concurrently with development. The optimal time for implementing superdikes is when existing assets are demolished and the site is leveled to accommodate new development.

Figure 5: Superdikes in the Study Area

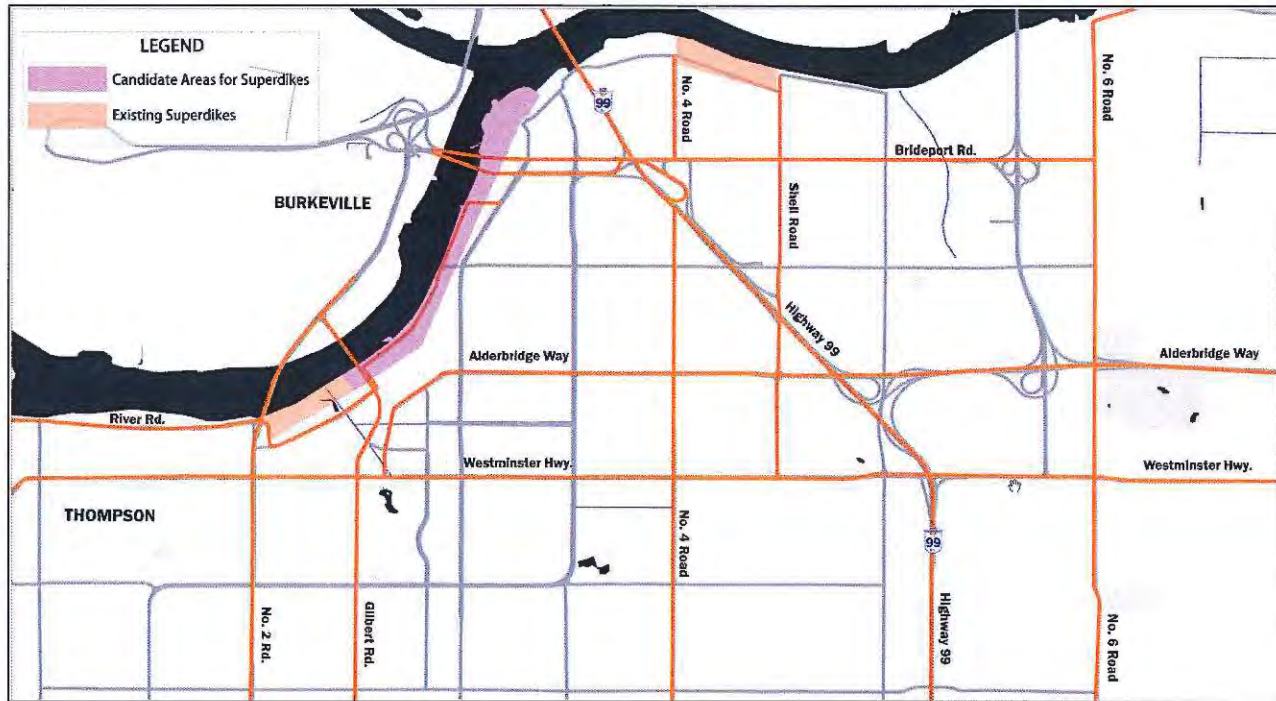

4.1.2 FLOOD PROOFING

Flood proofing is a strategy to minimizing the damage to critical infrastructure in the event of a dike breach. Buildings can be constructed as flood proofed by ensuring habitable space is set at an elevation above the flood risk zone. Damage and losses incurred during flooding are minimal as any valuable or vulnerable assets are located above the possible flood elevation. In these buildings, habitable space and sensitive assets are located above a prescribed ground floor elevation, and lower floors are used only for storage of flood-resistant or low value assets. Another flood proofing strategy is using only impermeable building materials and watertight building equipment below the prescribed flood risk elevation.

The City's influence on where private building operators locate their assets within their buildings is limited, however construction of buildings with habitable space or vital assets below a specified elevation may be prohibited through legislation. By flood proofing buildings located in a specified waterfront or low elevation area, vital assets are prohibited from being located in high risk zones so that flooding will only affect non-vital infrastructure. Generally, flood proofing legislation impacts only the construction of new buildings; existing buildings constructed prior to the legislation's implementation are typically not impacted except through building permit applications for renovations or additions.


As noted in *Section 2.5*, the City currently enforces flood proofing through the Flood Plain Designation and Protection Bylaw No. 8204. The Bylaw sets minimum Flood Construction Levels (FCL's) throughout the City. The FCL prescribes the minimum elevation where the underside of a floor system can be constructed. Long term raising of land levels has previously been recommended (2008-2031 Flood Protection Strategy); however, is challenging to implement in already built up areas. The bylaw also specifies setbacks from a dike ROW to make land available for diking.

Application: Flood Construction By-law Amendments

Every part of Lulu Island has a designated FCL, not only the waterfront area. The bylaw organizes FCL's by area, as shown in *Figure 6*. Presently, the majority of the Study Area fronting the existing dikes is within 'Area A' of the bylaw. The requirements for 'Area A' are to construct to 2.9 m or at least 0.3 m above the highest elevation of the crown of any road that is adjacent to the parcel. Commercial and industrial buildings are fully exempt if the main entrance is within 3 m of a

road. Developments within the Terra Nova Area are further exempt only requiring the underside of the floor slab to be greater than 2.6 m. There are no exemptions in the north-east portion of the Study Area, where a 2.9 m FCL is required.

Figure 6: Flood Construction Levels (FCL's)

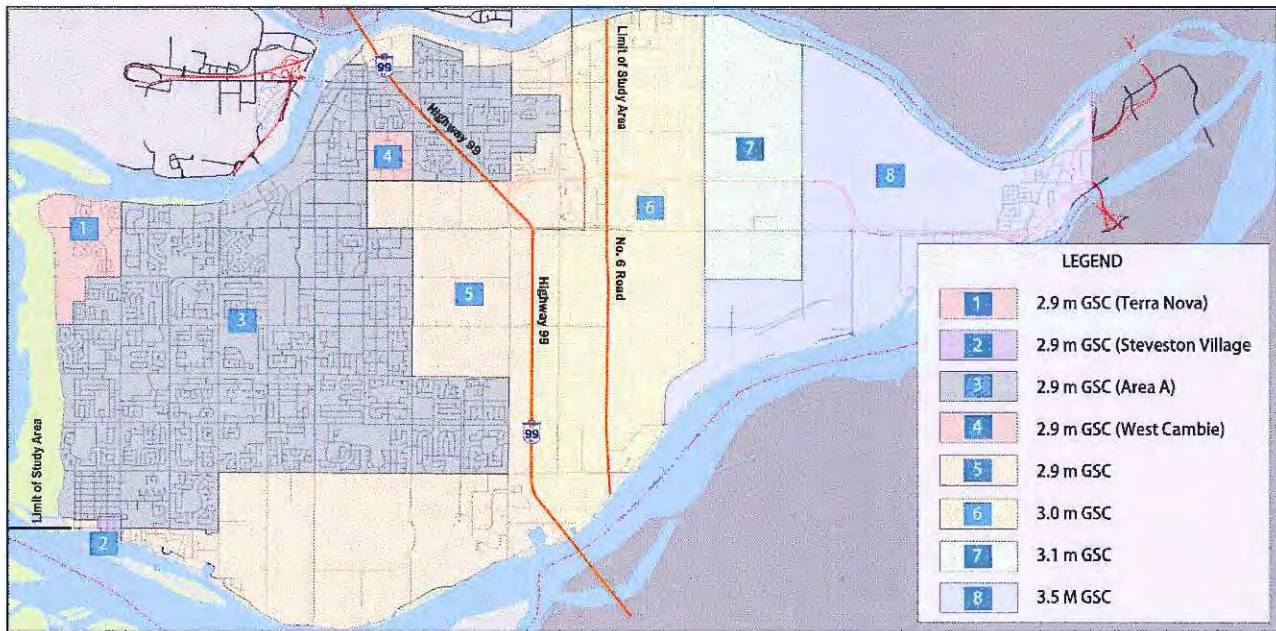

Amendments to Bylaw No. 8204 may be appropriate given the current predictions for sea-level rise. These amendments could include creation of an additional FCL Area adjacent to or within a stipulated distance from the existing dike or waterfront. The area could require an FCL of 4.7 m with exemptions based development size or parcel size. The FCL's would also have to consider overall lot raising and not just habitable space.

Examples of alternate concepts for consideration are provided below:

Single Family Dwellings and Small Lots: The bylaw could be amended to increase the rate at which land is raised concurrently with redevelopment. Presently, this rate is 0.3 m above the road centreline. For smaller lots, this strategy may then present challenges to local grading, producing inconsistent grades across lots and possibly introducing complex drainage patterns. Smaller lots are more likely to be highly constrained by existing grades on neighbouring lots and the road. Where grading is highly constrained, retaining walls may be required to accommodate substantial changes in elevation. Aesthetically, abrupt grade changes are undesirable, especially in neighbourhoods of single family homes. Varied grading between lots can also create issues with differential settlement. Grading designs that are consistent with the surrounding lot fabric and do not use retaining walls are preferred. The sidewalks and road network must also be carefully graded to maintain minimal slopes and safe connections at intersections. Any FCL increase must be implemented strategically to mitigate the potential grading challenges it may introduce.

Zoning bylaws could potentially be modified to provide additional guidance and requirements for lot coverage, setback, building heights, and others to help plan how the greater staggered lot elevations may integrate with each other. This will be challenging to implement but would increase the rate of increasing the land height in residential areas.

Mid-Size Development Lots or Building Permit Value Criteria: The bylaw could be amended to require raising to 4.7 m or 1 m (or alternate) above the road. Challenges may still exist with incorporating grading to adjacent parcels and roads.

Large Development Lots or Building Permit Value Criteria: The bylaw could be amended to require raising to 4.7 m and upgrading the local road network to accommodate access. This is currently done in practice, however, it is not specifically required under the current bylaw.

Additional studies on implementation of modified FCL bylaws should be conducted prior to proceeding with any changes. Input should be provided from architects, planners, engineers, environmental consultants and key stakeholders to obtain a comprehensive understanding of opportunities and factors to be mitigated while achieving flood protection goals.

Flood risk should be evaluated by the City periodically to determine whether increased risk warrants raising the target dike crest elevation. The bylaw can be amended as required to meet evolving City guidelines as they are adjusted per changes to flood risk conditions. For example, if the design crest elevation is raised from 4.7 m to 5.5 m, the FCL bylaw can be amended to reflect the new minimum elevation. In this way, flood proofing can progress over time as required.

4.1.3 PLANNING AND DEVELOPMENT CONTROLS

Planning and development controls may be implemented by enacting legislation to prohibit or restrict development in a defined hazard zone, such as a floodplain. More flexible policies can also be enacted to include conditional development approvals, where projects may be approved on condition that developers commit to implementing flood protection measures such as raising the abutting dike or raising the land elevation to a superdike.

Application: Site Assembly Size in the City Centre

In the Study Area, there are opportunities to pursue flood protection improvements in conjunction with new development, especially in areas expected to be intensified in the coming years. In Richmond, planning and development controls can be implemented through bylaws or amendments to the OCP.

Increasing the ground elevation of a single waterfront site is restricted by the existing elevations of adjacent lands. Where adjacent sites remain low, a redevelopment site can only be minimally raised without introducing challenges to the local road network and drainage patterns. To avoid complications arising from steep grades or retaining walls, the City can encourage developers to assemble multiple adjacent sites until a specified minimum waterfront frontage can be developed concurrently. This strategy permits increasing the dike crest level fully to the current standard elevation, and eases the transition of the waterfront to a superdike.

4.1.4 BREAKWATERS AND BARRIER ISLANDS

Breakwaters may be constructed to dissipate wave energy before waves reach the shore. This reduces the burden on the flood control structures at the waterfront. In combination with a foreshore structure, flood control structures with lower crest elevations may remain adequate to withstand increased wave run-up associated with increased water depths due to climate change and sea level rise.

With appropriate environmental consideration during design and construction, breakwaters and barrier islands can create intertidal habitat, such as sand flats, mud flats, salt marsh and eelgrass beds. These features can assist with erosion and wave attenuation. The intertidal habitat can work in combination with a constructed flood control structures like dikes and floodwalls, to mitigate flood risk.

Sea level rise and upland limitations to natural accretion within the Sturgeon Bank WMA could result in increased offshore depths beyond the West Dike, which could simultaneously increase wave heights reaching the West Dike.

Increased water depths off-shore reduce the wave attenuating properties of Sturgeon Bank. The current predictions and assumptions used in the BC Sea Dike Guidelines¹⁰ for the year 2100 suggest wave run-up may account for up to 2.7 m of the future dike crest elevation. The full extent of future crest height increases will require detailed observation and study of observed sea level rise.

¹⁰ Climate Change Adaption Guidelines for Sea Dikes and Coastal Flood Hazard Land Use Draft Policy Discussion Paper, Ausenco Sandwell, Jan 27 2011

Application: The West Dike Foreshore - Sturgeon Bank

The West Dike runs adjacent to Sturgeon Bank WMA comprised of intertidal brackish marsh, sandflats, mudflats, and open water. Maintenance and enhancement of these areas could provide wave dissipation and erosion protection.


The West Dike is a candidate for barrier islands, as presented in the Phase 1 LIDMP. Presently, the features of Sturgeon Bank dissipate wave energy. With future increased water depths on the Sturgeon Bank, wave heights are expected to increase, reducing the wave dissipate benefits of Sturgeon Bank, putting the West Dike at higher future risk of overtopping. Construction of breakwaters or barrier islands, including the maintenance and enhancement of intertidal habitat, is one approach to offset the potential future loss the existing wave dissipation benefits of Sturgeon Banks.



Photograph: Sturgeon Bank Management Area

While breakwaters and barrier islands will not address the immediate crest elevation requirements of 4.7 m, construction of barrier islands may allow for future deferrals of crest height increases. A general concept plan showing possible locations for barrier islands is presented in *Figure 7*.

Figure 7: Artistic Rendering of Barrier Island Concept for Sturgeon Bank

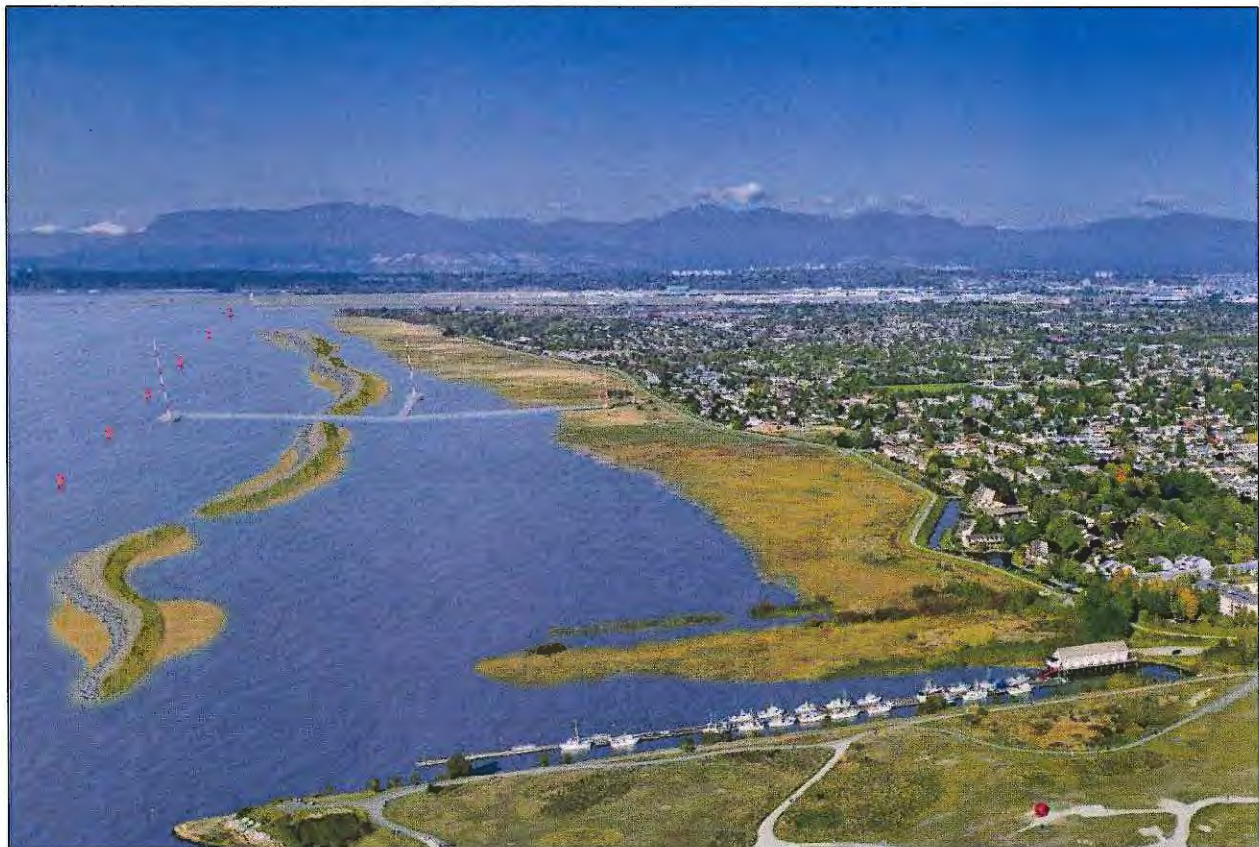

Breakwaters are most effective when constructed close to the shore, as broken waves grow again behind the breakwater under the influence of wind. The effectiveness depends also on the crest height of the breakwater, with a higher breakwater giving more wave reduction. Preliminary calculations from the Phase 1 LIDMP indicated that wave reduction with a breakwater or barrier islands constructed to +3.0 m geodetic would reduce wave height by 70% if constructed 200 m offshore, 60% at 500 m offshore, and 45% at 2000 m offshore.

Intertidal ecosystems are driven by interdependent components including rates of accretion, stream velocity, salinity, water quality, sea level, temperature, vegetation productivity, adjacent land use etc. that are complex to measure and model. Understanding the complexity of current conditions to better prepare for predictable increases in sea level rise will help direct strategies to maintain and enhance intertidal ecosystems. To this end, the City continues to work on inter-jurisdictional efforts to better understand the influencing factors that affect the Sturgeon Bank WMA, and intertidal habitat throughout the Fraser River Estuary.

4.1.5 SECONDARY DIKES

Secondary dikes work in conjunction with primary dikes to reduce the impact of a flood in the event that a primary dike is breached or overtopped. A secondary dike protects assets behind the secondary dike alignment while the lands between the primary and secondary dikes may flood intermittently. Secondary dikes are appropriate for implementation where the lands between the primary and secondary dike require a different measure of protection than lands behind the secondary dike. Eligible areas may include parking lots, parks or natural areas that can withstand intermittent flooding with minimal damage or losses incurred.

As secondary dikes are built inland, they can be less costly to build and less susceptible to damage during seismic events as compared to adaptations directly on the waterfront. The advantage is that an equivalent measure of protection can be extended to important inland assets, at a lower cost and lower seismic risk, than raising the primary dike at the waterfront. In the Study Area, secondary dikes are recommended for consideration where no critical assets are located on waterfront lands and there are assets further inland that require protection.

Application: Terra Nova

In future, the City may consider exploring establishing an alternative dike alignment for a part of the Terra Nova area through the park lands, as shown in *Figure 8*.

By setting the alignment inland, the City may avoid costly ground improvement measures that may be required for upgrading the existing alignment on the waterfront. Assets sensitive to flooding, such as private homes and heritage sites, would be protected by the secondary dike. Less sensitive assets, such as the park, trails and open space lands, can withstand occasional flooding with minimal losses incurred and therefore may be adequately protected by a dike with a relatively lower crest elevation.

Figure 8: Secondary Dike Alignment through Terra Nova



4.2 AREA SPECIFIC ADAPTATIONS

For the purposes of the master plan, an area specific adaptation is a structural adaptation that can achieve the target 4.7 m crest height, with consideration for a future increase to 5.5 m. This section outlines the preferred area specific adaptation measures for each of the thirteen design areas.

The recommended approaches to area specific adaptations includes: widen footprint to land or water side; raise in place / constrained dike; permanent floodwall; demountable floodwall.

Widen Footprint to Land or Water Side

Dikes are the most common form of structural flood protection. Lulu Island is currently protected by a perimeter ring dike, with floodwalls or alternative protections at some sites. In the Study Area, improvements to the existing dike should be pursued wherever possible.

As per the typical dike sections presented in *Appendix F*, the typical City dike upgrade cross-section consists of a 2:1 slope on the water side, and a 3:1 slope on the land side¹¹. Raising a dike by 1 m then triggers a 5 m horizontal space requirement (assuming the standard slopes are applied). Land side dike expansions can be challenging where the footprint is constrained by existing buildings, infrastructure, drainage ditches, or RMA's at the toe. Where a dike's land side toe is heavily constrained, a standard dike can be raised by widening its footprint onto the water side.

While shoreline habitat within the Fraser River Estuary will generally have a higher habitat value, and expansion into this area should be avoided, this may not always be the case. Implementation of area specific flood protection strategies will have an environmental impact regardless of the strategy put forth for a given area. Environmental assessments and valuation will be undertaken in the design construction phase, where possible habitat impact will be avoided. Where impact cannot be avoided, efforts will be made to mitigate, and if necessary compensate for impact following a net gain approach.

Raise in Place / Constrained Dike

Where dike expansion is constrained on both the land and water sides, it may be possible to raise a dike within its existing footprint, creating a constrained dike. This may be achieved by introducing a retaining wall on one or both sides. In Richmond, RMA's, development and infrastructure may abrupt to the landside of the dike, and intertidal habitat or marine infrastructure may be on the water side of the dike, meaning the dike may have constraints on both sides. In the Study Area, raising the dike in place can be pursued to minimize impacts on adjacent lands.

Permanent Floodwall

A floodwall is a constructed barrier designed to hold back flood waters. In the Study Area, floodwalls can be implemented where space is limited and a dike would interfere with other land uses or infrastructure, such as existing buildings. Floodwalls may also be preferable to a dike where access to the water is required for economic activity, such as fishing or shipping. Generally, where feasible, earth fill trapezoidal dikes are preferable as they generally have lower costs, they are easier to maintenance, they are more reliable and easier to repair in emergency situations.

Demountable Floodwall

In areas where waterfront access is desired, demountable flood barriers can be constructed so that the barrier is erected only when required, during storm events. Regular access to the waterfront is maintained otherwise. This adaptation may be applied in the Study Area at industrial sites or marinas, where activities require amenities directly on the waterfront that cannot be set back behind a floodwall or dike. Where possible, this form of dike is avoided due to their higher costs, mobilization requirements, and reliability concerns.

Parsons assessed each potential dike adaptation strategy based on the considerations outlined in *Section 3*. A summary of the recommendations for each design area is provided in *Table 3*. Key issues and opportunities to be considered when implementing the recommended adaptations are presented for each design area in *Section 4.2.1* through *Section 4.2.13*.

¹¹ Typical Cross Section River Dike Upgrade, City Drawing Mb-98, Golder Associates, 2008

Table 3: Recommended Area Specific Adaptations

FLOOD PROTECTION SEGMENT	RECOMMENDATION
WEST DIKE	
Seafair	Raise the dike on the existing alignment. Additional studies required to quantify drainage impacts of land side expansion, habitat impacts and costs associated with water side or land side expansion, and long term resiliency of a constrained dike solution.
Terra Nova	Raise the dike on the existing alignment. Additional studies required to quantify drainage impacts of land side expansion, habitat impacts and costs associated with water side or land side expansion, and long term resiliency of a constrained dike solution. Alternatively, consider routing a secondary dike inland through Terra Nova Rural Park, in lieu of raising the primary dike at the waterfront.
NORTH DIKE	
Thompson Terra Nova	Raise the dike on the existing alignment with land side expansion. Plan for the long-term raising of River Road.
Thompson Dover	Raise the dike on the existing alignment with land side expansion. Plan to raise River Road.
Oval	Existing area generally redeveloped as a superdike scenario (elevations from 4.0 to 4.5m). Future raisings to 5.5 m can take place on the existing alignments and integrate into the adjacent landscaping.
City Centre 1	Raise a dike with land side expansion. Consider creation of a set-back dike and inland raising (superdike) in conjunction with the future Middle Arm Waterfront Park construction.
City Centre 2	Raise the dike on the existing alignment with land side expansion in conjunction with redevelopment. Ensure any interim dike upgrades are compatible with the long term strategy of constructing superdikes.
Duck Island River Rock	Implement approved development plans. Plan for temporary dike to protect City assets if required to address sea level rise and climate change prior to implementation of the approved strategy at the Duck Island or River Rock Casino sites.
Industrial	Raise the dike on the existing alignment. Site specific solutions may be required at the Fraser River Terminal site. Plan for temporary dike along the alternate alignment if required to address sea level rise and climate change prior to implementation of a strategy at the Fraser River Terminal site.
Bridgeport Tait	Existing area generally redeveloped as a superdike scenario (elevation 4.7m). Future raisings to 5.5 m can take place on the existing alignments and integrate into the adjacent landscaping.
Industrial North East 1	Raise the dike on the existing alignment. Land acquisition may be required to facilitate construction of a trapezoidal dike (through redevelopment or otherwise). Implementation of a temporary floodwall adjacent to the waterfront lots may be required in advance of a permanent adaptation to address sea level rise and climate change. Consider Bath Slough Revitalization Initiative for future designs.
Industrial North East 2	Raise the dike on the existing alignment. Additional studies required to quantify drainage, habitat impacts, and costs associated with land side expansion of a trapezoidal dike. A constrained land side slope may be required to integrate with the existing drainage infrastructure. Consider Bath Slough Revitalization Initiative for future designs.
Industrial North East 3	Raise the dike on the existing alignment. Additional studies required to quantify drainage, habitat impacts, and costs associated with land side expansion of a trapezoidal dike. A constrained land side slope may be required to integrate with the existing drainage infrastructure.

4.2.1 SEAFAIR

The Seafair design area consists of established residential neighbourhoods of single family homes and townhouse complexes. On the foreshore, lands are undeveloped as is the case for the entirety of Sturgeon Bank. The Quilchena Golf & Country Club makes up the northern third of the plan; it sits entirely on Agricultural Land Reserve (ALR) lands. No major changes to the Seafair waterfront are identified in the OCP.

The preferred adaptation is to raise the dike on its existing alignment. Expansions to either side are constrained by environmental and infrastructure factors. These should be evaluated at the time an adaptation project is proposed to inform a detailed design that will best balance the considerations outlined in *Section 3*.

Barrier islands may be considered to reduce wave run-up and mitigate the need for future dike crest increases, as discussed in *Section 4.1.4*.

If ditches at the toe of the dike are to be filled, the associated loss of stormwater storage and conveyance may need to be compensated with underground pipes or alternative systems. Ditches may be designated as RMA's. Associated restrictions to alterations should be investigated when dike adaptations proceed to design and construction. Revised drainage plans must be compatible with local pump stations.

The Williams Road pump station was upgraded in 2013. The dike crest in the vicinity of the pump station is higher than adjacent lands. The pump station is not anticipated to pose special requirements for raising the dike on adjacent lands, however raising the dike crest over the pump station may increase the loading on this infrastructure. Dike adaptation projects that include raising the dike crest over the pump station should consider the pump station's structural and operational needs, including access.



LOCATION:

Williams Road to Granville Avenue

RECOMMENDATION:

Raise the dike on the existing alignment. Additional studies required to quantify drainage impacts of land side expansion, habitat impacts and costs associated with water side or land side expansion, and long term resiliency of a constrained dike solution.

ENVIRONMENTAL CONSIDERATIONS:

ENMS Strategy Area

- West Dike
- Traditional Neighbourhood

ESA Habitat Type

- Intertidal
- Shoreline

FREMP Data

- Red-coded

RMA Presence

- 5m RMA Presence

PHOTOGRAPH:

West Dike, facing north at Williams Road Pump Station

4.2.2 TERRA NOVA

The Terra Nova area is primarily recreational and agricultural including small, low density areas of single family homes. Recreational and natural areas include the Quilchena Golf & Country Club and Terra Nova Rural Park. The park has extensive natural areas with trails and observation decks at the slough and wetland areas. A large children's play structure, the Adventure Play Environment, opened in 2014 at the northwest corner of the park. No major changes to the waterfront or parklands are identified in the OCP for this design area. The entire park is identified as conservation lands within the OCP.

The open space provides a unique setting within the Study Area to consider both waterfront adaptations at the existing primary dike, or a secondary dike alignment through the park. For more information on the secondary dike option, refer to *Section 4.1.5*. Barrier islands may be considered for implementation on Sturgeon Bank to reduce wave run-up and avoid the need for future dike crest increases, as discussed in *Section 4.1.4*. Opportunities to create intertidal habitat areas in the park may be pursued when dike adaptations proceed.

The historic Terra Nova Cannery site is present on the north side of the park, in front of the private homes on River Road within the park. There are no visible remains of the cannery, except the shoreline recedes inwards around the former cannery's boundaries. Heritage status and associated restrictions to local alterations should be investigated when dike upgrades at the waterfront are proposed. Sheet pile may need to be considered for the segment adjacent to the Cannery site to minimize impacts.



LOCATION:

Granville Avenue to Terra Nova Rural Park

RECOMMENDATION:

Raise the dike on the existing alignment. Additional studies required to quantify drainage impacts of land side expansion, habitat impacts and costs associated with water side or land side expansion, and long term resiliency of a constrained dike solution.

Alternatively, consider routing a secondary dike inland through Terra Nova Rural Park, in lieu of raising the primary dike at the waterfront.

ENVIRONMENTAL CONSIDERATIONS:

ENMS Strategy Area

- West Dike

ESA Habitat Type

- Intertidal
- Shoreline

FREMP Data

- Red-coded

RMA Presence

- 5 m & 15m RMA Presence

PHOTOGRAPH:

West Dike, facing north at Terra Nova Rural Park

4.2.3 THOMPSON TERRA NOVA

The Thompson Terra Nova design area is residential, with recreational uses between River Road and the waterfront in the form of the dike trail and surrounding open space. The residential areas consist primarily of single family homes. No major changes to the Thompson Terra Nova design area are identified in the OCP.

The existing dike is situated between the Middle Arm of the Fraser River and River Road. Future expansions in some areas will be challenging due to the lack of space. Raising River Road will help with future dike crest elevation increases; however, will be challenging to implement.

Single family homes have driveway access from River Road throughout the design area. Individual lots are anticipated to be incrementally raised as they are redeveloped, however, this will take numerous decades to occur.



LOCATION:

Terra Nova Rural Park to McCallan Road

RECOMMENDATION:

Raise the dike on the existing alignment with land side expansion. Plan for the long-term raising of River Road.

ENVIRONMENTAL CONSIDERATIONS:

ENMS Strategy Area

- Fraser River
- Traditional Neighbourhood

ESA Habitat Type

- Intertidal
- Shoreline

FREMP Data

- Red-coded

RMA Presence

- None

PHOTOGRAPH:

North Dike, facing east near Terra Nova Rural Park entrance

4.2.4 THOMPSON DOVER

The Thompson Dover design area includes a City works yard and recycling facility, as well as mid-rise multi-family residential complexes. Recreational uses exist between River Road and the waterfront in the form of the dike trail and surrounding open space. Within the Thompson Dover design area, only the City works yard has driveway access to River Road. No major changes to the Thompson Dover design area are identified in the OCP. It is anticipated that the City works yard will be redeveloped to residential uses consistent with the surrounding neighbourhood at some point in the future.

It would be advantageous to raise River Road and assist in future land and dike crest increases in the long term. The multi-family residential lands were raised much higher than River Road when these sites were developed. Raising River Road at this location would not have the same access challenges as the Thompson Terra Nova area as there is no driveway access and the buildings are already on high land. River Road may be raised to the dike crest elevation on this section at any time. It would be advantageous to do a longer segment of River Road together, thus raising the road here should proceed concurrently with raising River Road in the Thompson Terra Nova design area to the west. Raising River Road along the City works yard may be considered concurrently with redevelopment of the site in the event that this site is redeveloped.

Issues and opportunities with raising River Road are further discussed in *Section 4.3.2*.



LOCATION:

McCallan Road to No. 2 Road Bridge

RECOMMENDATION:

Raise the dike on the existing alignment with land side expansion. Plan for the long-term raising of River Road.

ENVIRONMENTAL CONSIDERATIONS:

ENMS Strategy Area

- Fraser River
- City Centre

ESA Habitat Type

- Intertidal
- Shoreline

FREMP Data

- Red-coded

RMA Presence

- None

PHOTOGRAPH:

North Dike, facing east at Lynas Lane

4.2.5 OVAL

Within the Oval design area, the River Road alignment has been relocated south of development to the former rail corridor. The dike trail is part of a wide landscaped area abutting high rise condos. Redevelopment of the Oval design area began in advance of the 2010 Vancouver Winter Olympics, for which the Richmond Olympic Oval skating and fitness centre was built. The adjacent sites have since been redeveloped as well. The majority of these lands were filled to the dike crest elevation when the dike was raised in conjunction with site redevelopment. This design area is considered complete for the time being as the dike crest elevations vary from 4.0 m to 4.5 m, which is within range of the current 4.7 m target dike crest elevation.

There is one existing building directly west of the Dinsmore Bridge, forming the one remaining section of this design area to be raised. As this building has been set back from the waterfront, there is land available to raise the dike by widening the footprint to the land side at this site. This option may be pursued when this segment of River Road is decommissioned and relocated to the former rail corridor inland.



LOCATION:

No. 2 Road Bridge to Dinsmore Bridge

RECOMMENDATION:

Existing area generally redeveloped as a superdike scenario (elevations from 4.0 to 4.5m). Future raisings to 5.5m can take place on the existing alignments and integrate into the adjacent landscaping.

ENVIRONMENTAL CONSIDERATIONS:

ENMS Strategy Area

- Fraser River
- City Centre

ESA Habitat Type

- Intertidal
- Shoreline

FREMP Data

- Red-coded

RMA Presence

- 5 m & 15 m RMA Presence

PHOTOGRAPH:

North Dike, facing east at the Richmond Oval

4.2.6 CITY CENTRE 1

The City Centre 1 design area is presently long-established office industrial sites with sizeable parking lots. All sites have access from River Road, which runs along the waterfront in this design area. Marinas exist along the waterfront. The existing Middle Arm Waterfront Park is a linear park along the waterfront constructed concurrently with the Olympic Oval in 2009. The park’s amenities include the dike trail, playgrounds, and piers. Outdoor seating and stages for public events have been inset on the water side dike face. The OCP identifies major changes, including commercial intensification and creation of a large park.

A new park, Middle Arm Park, is proposed in the OCP adjacent to the existing Middle Arm Waterfront Park, as shown on the City Centre Area Plan presented in *Appendix A*. The existing River Road is planned to be realigned to the former rail corridor, and all lands between the rail corridor (the future River Road) and the waterfront are proposed to become the parklands forming Middle Arm Park. A concept sketch¹² is presented in *Figure 9*.

Plans for the new park have not yet been formalized; however, based on consultation with City staff, there is support for establishing the future dike alignment inland to improve public connectivity with the waterfront, and facilitate creation of intertidal habitat within the park. A set-back dike combined with inland raising to create a superdike would provide the most resilient solution for this area. Dike plans should be prepared concurrently with plans for the proposed park.

In the event that the City wishes to fortify the existing dike in advance of the development of Middle Arm Park, the City may consider raising a temporary flood protection adaptation in the interim until the proposed park’s plans are finalized and implemented.

LOCATION:

Dinsmore Bridge to Cambie Road

RECOMMENDATION:

Raise dike with land side expansion. Consider creation of a set-back dike and inland raising (superdike) in conjunction with the future Middle Arm Waterfront Park construction.



Figure 9: 2006 Concept Plan for the Proposed Middle Arm Park



ENVIRONMENTAL CONSIDERATIONS:

ENMS Strategy Area

- Fraser River
- City Centre

ESA Habitat Type

- Intertidal
- Shoreline

FREMP Data

- Yellow-coded
- Green-coded

RMA Presence

- None

PHOTOGRAPH:

North Dike at Gilbert Road, facing east

¹² Middle Arm Open Space Master Plan Concept, PFS Studio, December 2006

4.2.7 CITY CENTRE 2

Marinas are present throughout the City Centre 2 design area. The dike trail ends approximately 200 m north of Cambie Road, where the dike becomes marina parking lots. The proposed Middle Arm Park ends where the dike trail becomes parking lots. These parking lots are directly adjacent to the trafficable road; there is no shoulder between the road and the parking lots. Parking lots are raised from River Road with either steep slopes or retaining walls. This section of River Road will ultimately be realigned to the former rail corridor. Lands are planned to be redeveloped into high density commercial and mixed use buildings. Redevelopment of this area has begun.

While the optimal time to implement flood protection adaptations is concurrently with redevelopment of adjacent sites, the parcels of land in this area have narrow frontages, and smaller lot depths. This lot geometry can create challenges in implementing flood protection upgrades alongside redevelopment. These issues can be addressed through site assemblies, as detailed above in *Section 4.1.3*. The approach to flood protection in this area should generally mimic the recent improvements in the Oval area, with redevelopment raising the waterfront and the development site to establish a superdike.

The adaptations along this design area may include sites with floodwalls in order to maintain access and usage of the existing marinas. Any interim dike upgrades planned in this area should be designed with consideration for future adaptations to establish a superdike, the long-term goal in this area.



LOCATION:

Cambie Road to Moray Bridge

RECOMMENDATION:

Raise the dike on the existing alignment with land side expansion in conjunction with redevelopment. Ensure any interim dike upgrades are compatible with the long term strategy of constructing superdikes.

ENVIRONMENTAL CONSIDERATIONS:

ENMS Strategy Area

- Fraser River
- City Centre

ESA Habitat Type

- Intertidal
- Shoreline

FREMP Data

- Yellow-coded
- Green-coded

RMA Presence

- None

PHOTOGRAPH

Float homes off North Dike at Capstan Way

4.2.8 DUCK ISLAND

The Duck Island design area consists of former industrial lands, substantial parking lots and the River Rock Casino, which includes a marina and a wetland. The River Road alignment is inland from Duck Island. The former industrial area, now vacant, hosts the Richmond Night Market in the summer. The landowners of this area are currently seeking development approval to develop the site for commercial uses, consistent with the land uses identified in the OCP.

The existing waterfront lands in the Duck Island design area are entirely privately-owned. The landowners are currently developing private flood protection plans, to be reviewed and approved by the City. The plans are expected to be implemented in the near future, upon approval by the City.

In the event that a suitable strategy is not developed for the private waterfront lands in this area, or if an interim adaptation measure is required, there are inland alternative alignments available to the City to maintain protection for Lulu Island. The alternate alignment would follow River Road or the CN Rail Corridor through this design area. This approach is not preferred; however, details on the alignment and approach are outlined in TM#2 (*Attachment 2*).



LOCATION:

Moray Bridge to Oak Street

RECOMMENDATION:

As per approved development plans. Plan for temporary dike to protect City assets if required to address sea level rise and climate change prior to implementation of the approved strategy at the Duck Island or River Rock Casino sites.

ENVIRONMENTAL CONSIDERATIONS:

ENMS Strategy Area

- Fraser River
- City Centre

ESA Habitat Type

- Intertidal
- Shoreline

FREMP Data

- Red-coded
- Yellow-coded
- Green-coded

RMA Presence

- None

PHOTOGRAPH:

Marina at River Rock Casino

4.2.9 INDUSTRIAL

The Industrial design area includes industrial areas and parking lots. The Fraser River Terminal and a BC Hydro power station are located here. River Drive is aligned south of these sites, set back from the waterfront. These lands are anticipated to be industrial uses for the foreseeable future, as noted in the OCP.

The North Arm Bridge carrying the Canada Line and a bikeway was constructed in this design area in 2009 with ample clearance for dike works beneath the bridge deck. At the detailed design stage, dike works would need to be verified for confirmation that the footings can withstand additional loading without risk of settling, or any other risks that may compromise the bridge structure.

Adaptations in this area are constrained by existing waterfront development and uses. This industrial area includes the Fraser River Terminal - a shipping port and ship repair centre – as well as the BC Hydro Kidd #2 Substation. This area is anticipated to be industrial for the foreseeable future. Because waterfront lands are constrained by private industrial uses, the City may consider pursuing a temporary adaptation in the interim until the industrial sites are redeveloped. A temporary structure along the River Drive alignment may be considered. This approach is not preferred; however, details on the alignment and approach are outlined in TM#2 (*Attachment 2*).



LOCATION:

Oak Street Bridge to No. 4 Road

RECOMMENDATION:

Raise the dike on the existing alignment. Site specific solutions may be required at the Fraser River Terminal site. Plan for temporary dike along the alternate alignment if required to address sea level rise and climate change prior to implementation of a strategy at the Fraser River Terminal site.

ENVIRONMENTAL CONSIDERATIONS:

ENMS Strategy Area

- Fraser River
- City Centre

ESA Habitat Type

- Intertidal
- Shoreline

FREMP Data

- Red-coded
- Green-coded

RMA Presence

- None

PHOTOGRAPH:

North Dike, west of Fraser River Terminal

4.2.10 BRIDGEPORT TAIT

The Bridgeport Tait design area was formerly entirely industrial. An auto repair facility remains at its eastern edge. The remainder of these lands were recently developed to high-rise multi-family residential, with ongoing development of associated residential and commercial uses.

During site development, the dike crest elevation was raised to 4.7 m and the development lands were filled to a superdike condition. This area is considered complete for the time being. A wide landscaped area exists between the waterfront and the buildings, providing a trail through the neighbourhood at the waterfront. Future dike crest height increases can be accommodated in this area, and integrated with the local landscaping and waterfront trail.



LOCATION:

No. 4 Road to Shell Road

RECOMMENDATION:

Existing area generally redeveloped as a superdike scenario (elevation 4.7m). Future raisings to 5.5 m can take place on the existing alignments and integrate into the adjacent landscaping.

ENVIRONMENTAL CONSIDERATIONS:

ENMS Strategy Area

- Fraser River
- City Centre

ESA Habitat Type

- Intertidal
- Shoreline

FREMP Data

- Red-coded
- Yellow-coded

RMA Presence

- None

PHOTOGRAPH:

North Dike, facing west at the Park Riviera Development

4.2.11 INDUSTRIAL NORTH EAST 1

The Industrial NE 1 design area is entirely industrial, and no major changes are outlined in the OCP. Limited space is available in this design area as River Road is either directly on the waterfront or confined by developed lots. Where River Road is adjacent to the waterfront, it will need to be raised concurrently with dike works to meet the target dike crest elevation with a standard trapezoidal cross-section. This may impact driveway access to the lots south of River Road. An interim constrained land side dike toe may be required to mitigate impacts to adjacent lots in the interim until redevelopment and land raising occurs.

A number of small businesses operate on a narrow strip of land between River Road and the waterfront. These lands, approximately 2 ha, are privately owned. The City may consider acquiring these lands to implement diking in this area. The acquisition of approximately 2 ha of private lands north of Simpson Road may add significant costs to diking in this area.

A floodwall may be considered for this section of the design area as an interim solution in advance of the City implementing a permanent trapezoidal dike adaptation. Any interim solutions will require cooperation with the existing landowners. Outside this section, there are lands available from the River Road ROW to the shore to raise the existing dike. At the detailed design stage, if lands are too highly constrained to expand the dike footprint, the City may also consider acquiring additional lands from the parking lots on the south side of River Road.

The Industrial North East 1 LIDMP Study Area is bounded by Bath Slough. Through the Bath Slough Revitalization Initiative, adopted in 2014, the City has conducted a number of innovative ecological initiatives along Bath Slough including water quality improvements, riparian enhancement and native pollinator pasture initiatives. The Bath Slough Revitalization Initiative should be considered in the design and construction phase of diking in this area.



LOCATION:

Shell Road to Bath Slough

RECOMMENDATION:

Raise the dike on the existing alignment. Land acquisition may be required to facilitate construction of a trapezoidal dike (through redevelopment or otherwise). Implementation of a temporary floodwall adjacent to the waterfront lots may be required in advance of a permanent adaptation to address sea level rise and climate change. Consider Bath Slough Revitalization Initiative for future designs.

ENVIRONMENTAL CONSIDERATIONS:

ENMS Strategy Area

- Fraser River
- Industrial

ESA Habitat Type

- Intertidal
- Shoreline
- Freshwater Wetland

FREMP Data

- Yellow-coded
- Green-coded

RMA Presence

- 15m RMA Presence

PHOTOGRAPH:

North Dike, facing west at No. 5 Road


4.2.12 INDUSTRIAL NORTH EAST 2

The Industrial NE 2 design area is entirely industrial. River Road abuts the waterfront. Port Metro Vancouver owns a vacant lot west of the Knight Street Bridge. There are large ditches along the south side of River Road. No major changes to this area are presented in the OCP.

River Road is currently the dike in this design area. There are insufficient lands available north of the road to raise the dike, although the elevation of the entire River Road may be raised. No businesses within this area access the waterfront directly from their lots, therefore maintaining waterfront access for these businesses is not required. Existing drainage on the land side may need to be modified as large ditches are present along River Road.

Public access to the waterfront may be improved by the addition of a trail adjacent to the raised River Road, in compliance with the City’s long term vision of a connected trail system at the waterfront of the entire island.

The Industrial North East 2 LIDMP Study Area is bounded by the Bath Slough. Through the Bath Slough Revitalization Initiative, adopted in 2014 the City has conducted a number of innovative ecological initiatives along Bath Slough including water quality improvements; riparian enhancement and native pollinator pasture initiatives. The Bath Slough Revitalization Initiative should be considered in the design construction phase of dike upgrades in this area.

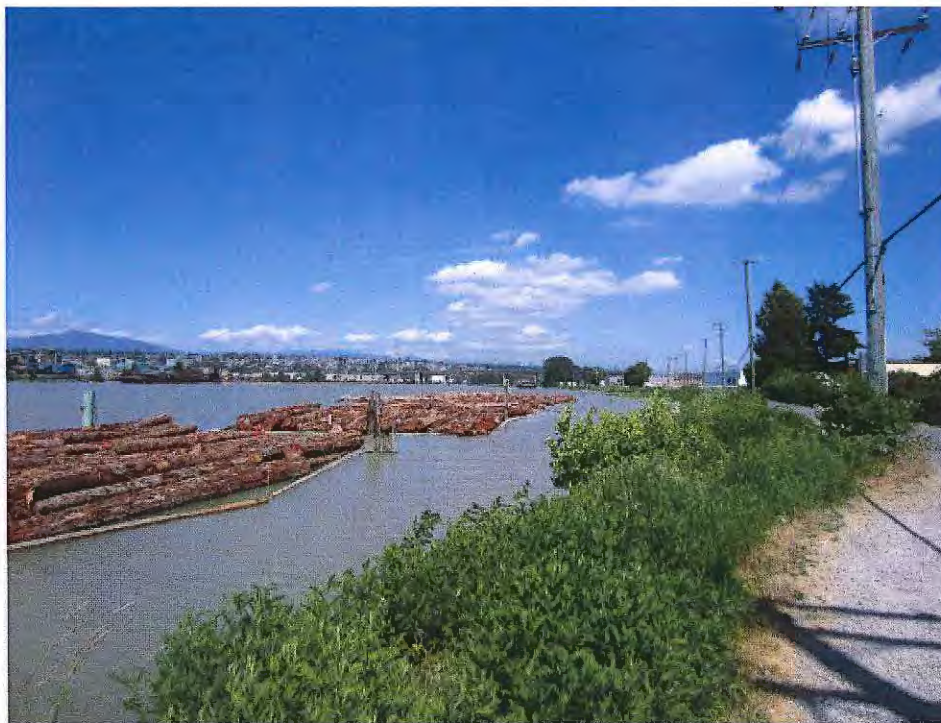

LOCATION:

Bath Slough to Knight Street Bridge

RECOMMENDATION:

Raise the dike on the existing alignment. Additional studies required to quantify drainage, habitat impacts, and costs associated with land side expansion of a trapezoidal dike. A constrained land side slope may be required to integrate with the existing drainage infrastructure. Consider Bath Slough Revitalization Initiative for future designs.

ENVIRONMENTAL CONSIDERATIONS:

ENMS Strategy Area

- Fraser River
- Industrial

ESA Habitat Type

- Intertidal
- Shoreline
- Freshwater Wetland

FREMP Data

- Red-coded
- Yellow-coded
- Green-coded

RMA Presence

- 15m RMA Presence

PHOTOGRAPH:

North Dike, facing east at Bath Slough Pump Station

4.2.13 INDUSTRIAL NORTH EAST 3

The Industrial NE 3 design area is entirely industrial. River Road abuts the waterfront and provides access to substantial parking lots for associated industrial sites and businesses. There are large ditches along the south side of River Road. No major changes to this area are presented in the OCP.

River Road is currently the dike in this design area. Large natural areas along the waterfront host mature trees, primarily on the north side of the dike. There is also smaller, less established vegetation along the south side of River Road. It is anticipated that the entire road must be raised to implement dike crest increases.

A lumber yard occupies a substantial part of this design area. The City has a ROW through the site over the River Road alignment, however access is blocked off with gates at either end of the lumber yard site. The waterfront trail is also currently blocked off through this area. If ever this site is redeveloped, dike adaptations may be pursued concurrently. However, no major changes to this industrial area are anticipated in the near future.



LOCATION:

Knight Street Bridge to No. 6 Road

RECOMMENDATION:

Raise the dike on the existing alignment. Additional studies required to quantify drainage, habitat impacts, and costs associated with land side expansion of a trapezoidal dike. A constrained land side slope may be required to integrate with the existing drainage infrastructure.

ENVIRONMENTAL CONSIDERATIONS:

ENMS Strategy Area

- Fraser River
- Industrial

ESA Habitat Type

- Intertidal
- Shoreline

FREMP Data

- Red-coded
- Green-coded

RMA Presence

- 15m RMA Presence

PHOTOGRAPH:

Conveyor belt over North Dike at No. 6 Road.

4.3 SITE SPECIFIC ADAPTATIONS

Where existing infrastructure conflicts with the recommended flood protection adaptation, a custom design for that site may be required, or the existing infrastructure may be retrofitted to accommodate diking. Infrastructure including but not limited to pump stations, road or railways, bridges or industrial infrastructure may present site-specific constraints that preclude the implementation of the recommended adaptation for the rest of that design area.

Ideally, dike adaptations are pursued when the adjacent lands are redeveloped. Flood protection measures can then be included in the scope of the proposed works. However, existing infrastructure may be suitable for a design life extending far into the future, farther than the City wishes to defer dike adaptations. In these cases, interim adaptations may be pursued.

Site-specific adaptation designs, whether permanent or temporary, should take into account all the considerations listed in *Section 3*.

4.3.1 BRIDGES

Bridges have unique constraints within a design area. The recommended adaptation for a design area may not be feasible at a bridge site, in which case a site-specific adaptation may be designed to be integrated with the standard adaptation on either side of the bridge.

A list of bridges and the particular constraints that may guide a site-specific adaptation is presented in *Table 4* below. Note that the recommended adaptation strategies in the table are recommended based on adaptations proceeding in advance of any bridge upgrades or replacement. If any bridges are to be upgraded or replaced, flood protection measures at the bridge site should be included within the scope of work.


Table 4: Bridge Constraints and Recommended Adaptations

BRIDGE NAME (OWNERSHIP, BRIDGE TYPE)		
AREA	CONSTRAINTS AND CONDITIONS	RECOMMENDED ADAPTATION STRATEGY
1) NO. 2 ROAD BRIDGE (CITY OF RICHMOND, ROAD)		
Oval	<ul style="list-style-type: none"> • Bridge deck is low. • Footings are under the existing dike. • Bridge crosses over River Road. • Bridge crosses over dike trail. • Bike ramp to bridge from dike trail sensitive to grade changes. 	Tied to abutments
2) DINSMORE BRIDGE (CITY OF RICHMOND, ROAD)		
Oval	<ul style="list-style-type: none"> • Bridge deck is low. • Footings are under the existing dike. • Bridge crosses over River Road with 4.3m clearance. • Bridge crosses over dike trail. 	Tied to abutments
3) MORAY BRIDGE (CITY OF RICHMOND, ROAD)		
City Centre 1	<ul style="list-style-type: none"> • Bridge deck is very low. • Existing dike is inland, not under the bridge. • Bridge does not cross any road or trail. • No waterfront trail currently exists under the bridge. • Existing dike is aligned over the bridge. 	Tied to abutments
4) SEA ISLAND CONNECTOR (CITY OF RICHMOND, ROAD)		
City Centre 1	<ul style="list-style-type: none"> • Bridge deck is very low. • Existing dike is inland, not under a bridge. • Bridge does not cross any road or trail. • No waterfront trail currently exists under the bridge. • Existing dike is aligned over the bridge. 	Tied to abutments

BRIDGE NAME (OWNERSHIP, BRIDGE TYPE)		
AREA	CONSTRAINTS AND CONDITIONS	RECOMMENDED ADAPTATION STRATEGY
5) MIDDLE ARM CANADA LINE BRIDGE (TRANSLINK, RAIL)		
Duck Island	<ul style="list-style-type: none"> None 	Under span
6) MARPOLE RAIL BRIDGE (CP RAIL, RAIL)		
Duck Island	<ul style="list-style-type: none"> Bridge deck is low. Timber trestle bridge; minimal space between footings. Not currently operational. Repairs required to return bridge to operational conditions. CP Rail's intentions for future use are unknown. 	Tied to abutments
7) OAK STREET BRIDGE (BC MINISTRY OF TRANSPORTATION, ROAD)		
Duck Island	<ul style="list-style-type: none"> None 	Under span
8) NORTH ARM CANADA LINE BRIDGE (TRANSLINK, RAIL)		
Industrial	<ul style="list-style-type: none"> None 	Under span
9) KNIGHT STREET BRIDGE (TRANSLINK, ROAD)		
Industrial NE2	<ul style="list-style-type: none"> None 	Under span
10) PROPOSED BURKEVILLE PEDESTRIAN BRIDGE (CITY OF RICHMOND, PEDESTRIAN)		
City Centre 1	<ul style="list-style-type: none"> Proposed bridge design has not yet been prepared. Diking to be incorporated when design proceeds. 	N/A

The locations of all bridges listed in Table 3 are shown in *Figure 10*.

Figure 10: Bridges in the Study Area

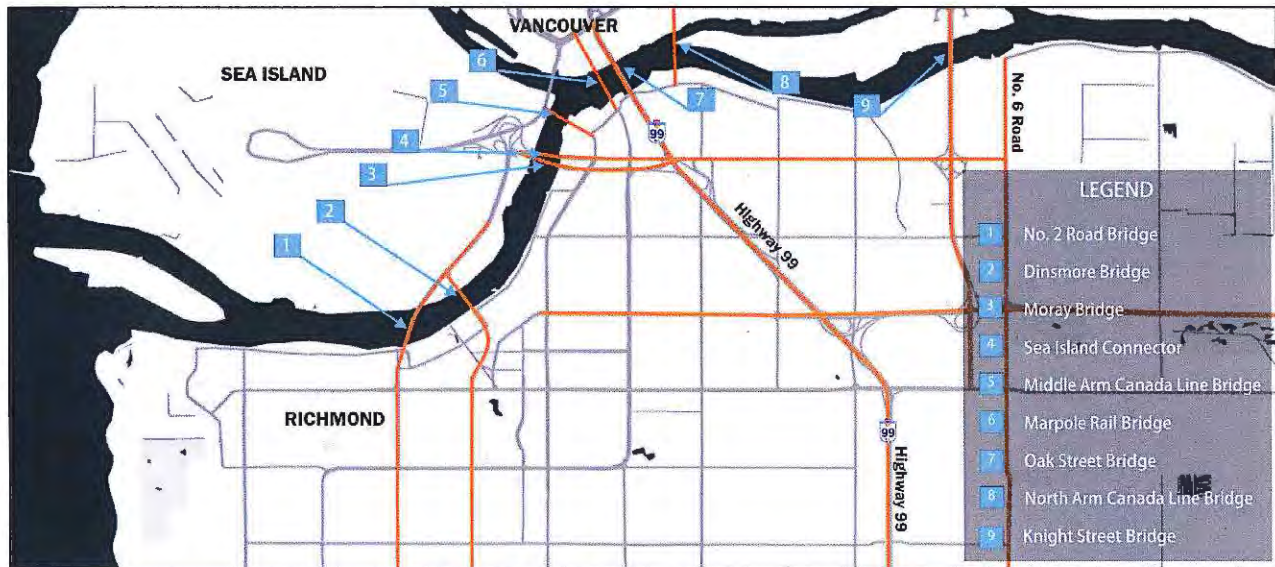

4.3.2 RAISE RIVER ROAD

In the Thompson Terra Nova and Thompson Dover areas, River Road is immediately adjacent to the existing dyke; however, is constructed at a lower elevation to match the existing developed area. It is anticipated that land-side expansion of the existing dike will encroach on River Road. As such, the City should consider raising the grade of River Road from Cornwall Drive to No. 2 Road. The area identified for this strategy is show in *Figure 11*.

Figure 11: Raising River Road in the Thompson Neighbourhood



The benefits to long-term flood protection associated with raising River Road include:

- Improves dike stability and seepage performance;
- Reduce requirement for water-side expansion and impacts to environmental habitat;
- Promotes the long-term increase in site grades for redevelopment of the Thompson Residential Area; and,
- Facilitates future dike crest increases or overbuilding of the existing dike height to accommodate settlement during a seismic event.

Challenges to raising River Road will include:

- Maintaining driveway access and for the single family residential developments;
- Tying the raised River Road into adjacent streets;
- Addressing settlement concerns with underground utilities;
- Planning to cost-effectively stage incrementally raising of River Road; and,
- Addressing potential impacts to RMA's and ESA's.

Raising River Road is then a very long-term strategy to assist with achieving higher waterfront land elevations, and minimize future waterside works to achieve higher crest elevations.

5 Timing of Adaptation Projects

Implementation of adaptations is best pursued alongside adjacent works. For example, when adjacent lands are being developed, dike adaptations can be included in the scope of site redevelopment. If there are substantial works to an area that are upcoming, the City may choose to implement an interim adaptation until those adjoining works proceed.

5.1 REDEVELOPMENT OF SMALL LOTS

Small lots with narrow frontages are highly constrained by grading. There must be adequate lands available to raise a dike immediately to the target crest elevation. In areas where lot sizes are too small to implement adaptations that may immediately achieve the dike crest elevation, lands can be incrementally raised by raising the lots in small intervals each time it is redeveloped. Similarly, the frontage road can be raised by a practical interval whenever substantial road rehabilitation works proceed. This is a very long-term strategy.

The ground elevation of individual lots may be raised as they are redeveloped, however the grading will be constrained by matching neighbouring ground elevations, as well maintaining driveway access to the road. If the road is also raised, then individual lots can be raised higher, however existing lots at relatively low elevations must still have driveway access to the road. This limits the overall height that the frontage road can be raised. Over time, the frontage road and adjoining lots are raised at different times. In this way, the road and surrounding lots are raised in steps. In the very long term, the overall land elevation can be raised to the target dike crest elevation using this strategy. The City may pursue interim adaptations if a greater level of flood protection is deemed to be required before the lands can be raised to the specified elevation.

Where flood protection will be integrated with redevelopment, lot consolidation is preferred to minimize impacts associated with tying in to neighbouring properties.

5.2 LAND ACQUISITIONS & LEGAL ACCESS

The City may need to acquire property where development is immediately adjacent to the waterfront, and bound on the land side by roads, buildings or other assets. Obtaining a sufficient ROW from some properties for diking may effectively sterilize the lot, leaving insufficient space available for development. In those instances, the City may need to acquire the entire property in order to implement dike adaptations. The riverfront lots between Shell Road and No. 5 Road may be candidates for acquisition when dike upgrades proceed in that area, depending on land requirements to implement dike upgrades.

The City should acquire easements where dikes are being constructed on private property. All adaptations on private lands depend on the City being able to secure legal access to the property in order to maintain them.

5.3 RAISING THE TARGET DIKE CREST ELEVATION

The City should monitor sea level rise to pursue flood protection adaptations when higher dike crest elevations become necessary. Presently, all adaptations will be designed to meet the 4.7 m target crest elevation, with consideration for an increase to 5.5 m. Depending on whether sea level rise predictions materialize, the City may wish to raise the target dike crest elevation.

5.4 INTERIM ADAPTATIONS

Temporary adaptations, such as a demountable floodwall, may be necessary where existing conditions are constrained by existing infrastructure (such as bridges, roads, ditches, or buildings) that cannot be impacted or modified to make way for diking. Temporary adaptations may also be pursued in instances where the City cannot yet secure adequate lands or capital to implement the ultimate adaptation.

The timeline until the ultimate adaptation can be implemented should be considered when allocating resources to temporary works. For example, if the interim adaptation will only be in place for a period of a few months, it is likely not worth investing substantial resources into it. Interim adaptations may be considered if necessitated by sea level rise or any other increase in flood risk.

Compatibility with the ultimate adaptation should be considered in the design of any interim adaptation. An interim adaptation should be easily decommissioned, or able to remain in place indefinitely without interfering with the ultimate

adaptation or any other land use. The ultimate adaptations are anticipated to be implemented alongside concurrent waterfront works, as noted in *Table 5*.

Table 5: Triggers to Implementation of Adaptations

AREA	EXISTING	SUMMARY OF RECOMMENDED ADAPTATION	TRIGGER TO IMPLEMENTATION OF RECOMMENDED ADAPTATION
Steveston	Earthfill Dike	Raise Dike on Existing Alignment & Consider Construction of Barrier Islands	City Initiative
Seafair	Earthfill Dike	Raise Dike on Existing Alignment & Consider Construction of Barrier Islands	City Initiative
Terra Nova	Earthfill Dike	Raise Dike on Existing Alignment & Consider Construction of Barrier Islands	City Initiative
Thompson Terra Nova	Earthfill Dike	Raise Dike on Existing Alignment & Plan for Long-term Raising of River Road	River Road is Reconstructed
Thompson Dover	Earthfill Dike	Raise Dike on Existing Alignment & Plan for Long-term Raising of River Road	River Road is Reconstructed
Oval	Superdike	Complete	N/A
City Centre 1	Earthfill Dike	Raise Dike at Waterfront or Set Back & Fill Adjoining Lots to Superdikes	Development of Middle Arm Park
City Centre 2	Earthfill Dike	Raise Dike on Existing Alignment & Fill Adjoining Lots to Superdikes	Redevelopment
Duck Island	Varies	Implement Recommendations of Approved Developer's Plan	Approval of Developer's Plan
Industrial	Varies	Raise Dike on Existing Alignment	Redevelopment of Fraser River Terminal
Bridgeport Tait	Superdike	Complete	N/A
Industrial North East 1	Earthfill Dike	Raise Dike on Existing Alignment	Assembly of Sufficient Lands to Implement Dike Upgrades
Industrial North East 2	Earthfill Dike	Raise Dike on Existing Alignment	Rehabilitation of River Road or Redevelopment of Industrial Sites
Industrial North East 3	Earthfill Dike	Raise Dike on Existing Alignment	Rehabilitation of River Road or Redevelopment of Industrial Sites

6 Implementation Opportunities

Dike upgrades are best undertaken alongside alterations to adjacent lands and infrastructure. In addition to the examples of concurrent infrastructure development noted in the sections above, dike adaptations may present opportunities to implement projects strategically to accomplish other City goals.

6.1 WATERFRONT TRAIL SYSTEM

The City's Parks Planning and Design (Parks) department has identified a goal to improve public access to the waterfront. Recreational trails and linear parks should be considered wherever dikes are modified. Even where waterfront trails are

already present, there may be an opportunity to increase waterfront access by improving trails with ramps or paved surfaces. Dike trails should remain accessible to people using mobility aids, such as wheelchairs or strollers.

The Parks department's preference is to have a trail directly adjacent to the water, without any rerouting inland, even if this means trails are sometimes flooded.

6.2 INTERTIDAL ZONES

Dike adaptations that proceed alongside the development of waterfront parks may be suited to the concurrent development of intertidal zones, to create additional habitat. The local ecosystem's productivity may be increased by providing a rich riparian environment. These intertidal zones may be integrated with the typical foreshore rip rap or other erosion protection by inseting habitat at lower elevations to be closer to the daily water level, and flooded during high water events. Projects incorporating the development of intertidal habitat may be designated as compensation sites for alterations required in environmentally sensitive areas.

6.3 HABITAT BANKING

As the Study Area lies within intertidal, shoreline and upland riparian habitat, environmental impact may be unavoidable. Environmental assessments and valuation will be undertaken in the design construction phase, where possible habitat impact will be avoided. Where impact cannot be avoided, efforts will be made to mitigate, and if necessary compensate for impact following a net gain approach. To achieve a net gain approach to compensation the City may consider establishing a formal habitat banking program. Habitat banking guidelines should articulate appropriate compensation ratios by habitat type, monitoring periods and success measures for created or enhanced habitat. Additionally a hierarchy of compensation options may be considered that replaces habitat types in order of priority as follows:

- Create or increase productive capacity of like for like habitat within the same ecological unit;
- Create or increase the productive capacity of unlike habitat in the same ecological unit; and
- Create or increase the projective capacity of habitat in a different ecological unit.

Habitat credits could be applied to multiple projects, or stored for future dike works. A formal habitat banking program may assist with the implementation of long term flood protection infrastructure upgrade programs.

7 Recommendations

Key recommendations for the Phase 2 LIDMP Study Area are outlined as follows:

1. Plan to raise the existing dike on its existing alignment.

The existing dike alignment along the waterfront is established and well defined. There is limited basis to support any major changes to the alignment of the existing dike, thus the recommendations are generally in keeping with traditional dike crest increases, with consideration for area specific constraints and opportunities.

2. Prepare conceptual level designs for the West Dike upgrades and conduct drainage and environmental studies on the alternatives.

Future crest height increases to the West Dike will required landside or waterside expansion. Both will have impacts to either intertidal, or upland riparian habitat. Environmental impacts should be quantified, and an approach of avoid, mitigate, and compensate following a net gain approach should be used to in evaluating the preferred strategy.

Landside expansion will impact drainage infrastructure. Impacts should be quantified to identify potential internal drainage network upgrades required if landside expansion is the preferred alignment.

3. Continue to monitor sea level rise.

Design crest height elevations are selected with consideration for climate change and sea level rise predictions. The City should continue to monitor sea level rise and adjust crest height targets and City flood protection police as required to address any changes in predicitions.

4. Plan to establish a habitat banking program for dike improvement projects.

Where impact to habitat cannot be avoided, efforts will be made to mitigate, and if necessary compensate for impacts following a net gain approach. To achieve a net gain approach to compensation, the City may consider establishing a formal habitat banking program. Habitat banking guidelines should outline appropriate compensation ratios by habitat type, monitoring periods, and success measures.

5. Plan for implementation of offshore protection along the West Dike as a response to climate change and sea level rise.

Sea level rise and upland limitations to natural accretion within the Sturgeon Bank WMA could result in increased offshore depths beyond the West Dike, which could simultaneously increase wave heights reaching the West Dike. Offshore barrier islands are one option to consider to dissipate wave energy prior to reaching the west dike, thereby minimizing future dike crest increases.

With appropriate environmental consideration during design and construction, breakwaters and barrier islands can create intertidal habitat, such as sand flats, mud flats, salt marsh and eelgrass beds. These features can assist with erosion and wave attenuation. The intertidal habitat can work in combination with a constructed flood control structures like dikes and floodwalls, to mitigate flood risk.

The City should continue to coordinate with relevant agencies including (Port of Vancouver, Fisheries and Oceans Canada, and others) to research and identify opportunities to improve flood protection and enhance intertidal habitats in the Sturgeon Bank WMA and throughout the Fraser River Estuary.

6. Plan to raise River Road in the Thompson neighborhood.

The existing dike in the Thompson Neighborhood is confined by the Fraser River and River Road. Increasing the grade of River Road will improve dike stability and resilience; and minimize requirement to expand the dike into the Fraser River. The City should plan to incrementally raise River Road.

7. Consider acquiring land to accommodate future dike construction between Shell Road and No. 5 Road.

Land acquisition may be required to accommodate construction of a future trapezoidal dike between Shell Road and No. 5 Road. It is anticipated that acquisition will primarily be achieved through redevelopment, however, where redevelopment does not occur; the City may consider opportunistic land purchase to accommodate future dike crest height increases in the area. Plan to complete a conceptual design of the future dike through the constrained area to verify the future dike footprint.

8. Plan for the long-term raising of lands adjacent to and inland of the existing dikes.

Long term raising of land levels has previously been recommended (2008-2031 Flood Protection Strategy). Maximizing the width of raised land adjacent to the river decreases flood and seismic risks by increasing the integrity of the dike. Plan to raise the ground elevation of waterfront development sites to the prescribed dike crest elevation.

9. Support site assemblies along the waterfront that promote cohesive adaptations for flood protection.

Large developments along the waterfront allow for major improvements to flood protection infrastructure and often result in robust superdike conditions.

10. Consider enhanced floodproofing through amendments to the FCL Bylaw

The City’s Flood Construction Level (FCL) Bylaw establishes minimum levels to which land needs to be raised. Amending the FCL bylaw is the recommended area wide strategy to regulate raising ground elevations with redevelopment to improve flood protection throughout the Study Area. Plan to conduct an assessment on the implementation of a modified FCL bylaw.

11. Facilitate public access to the waterfront.

Integrate new trails and trail improvements with diking projects; provide trails and waterfront recreation areas that are accessible to persons using mobility aids; and, route any new trails along the waterfront instead of rerouting the trail inland.

8 Closure & Next Steps

Parsons has characterized the existing conditions and constraints of the Study Area, and has established and recommended preferred area wide and area specific adaptation strategies for the City’s consideration.

The recommended next steps to finalize the Phase 2 LIDMP are:

- 1. Council Review;
- 2. Key External Stakeholder Review;
- 3. Public Information Session and Consultation;
- 4. Revise the Draft Final Master Plan Report per consultation if required; and
- 5. Council adoption of the Final Master Plan

Regards,
DRAFT

Reviewed By:
DRAFT

Evelyne Russell, EIT
Project Engineer

Todd Bowie, P.Eng
Project Manager